


# SMART HOME SYSTEM

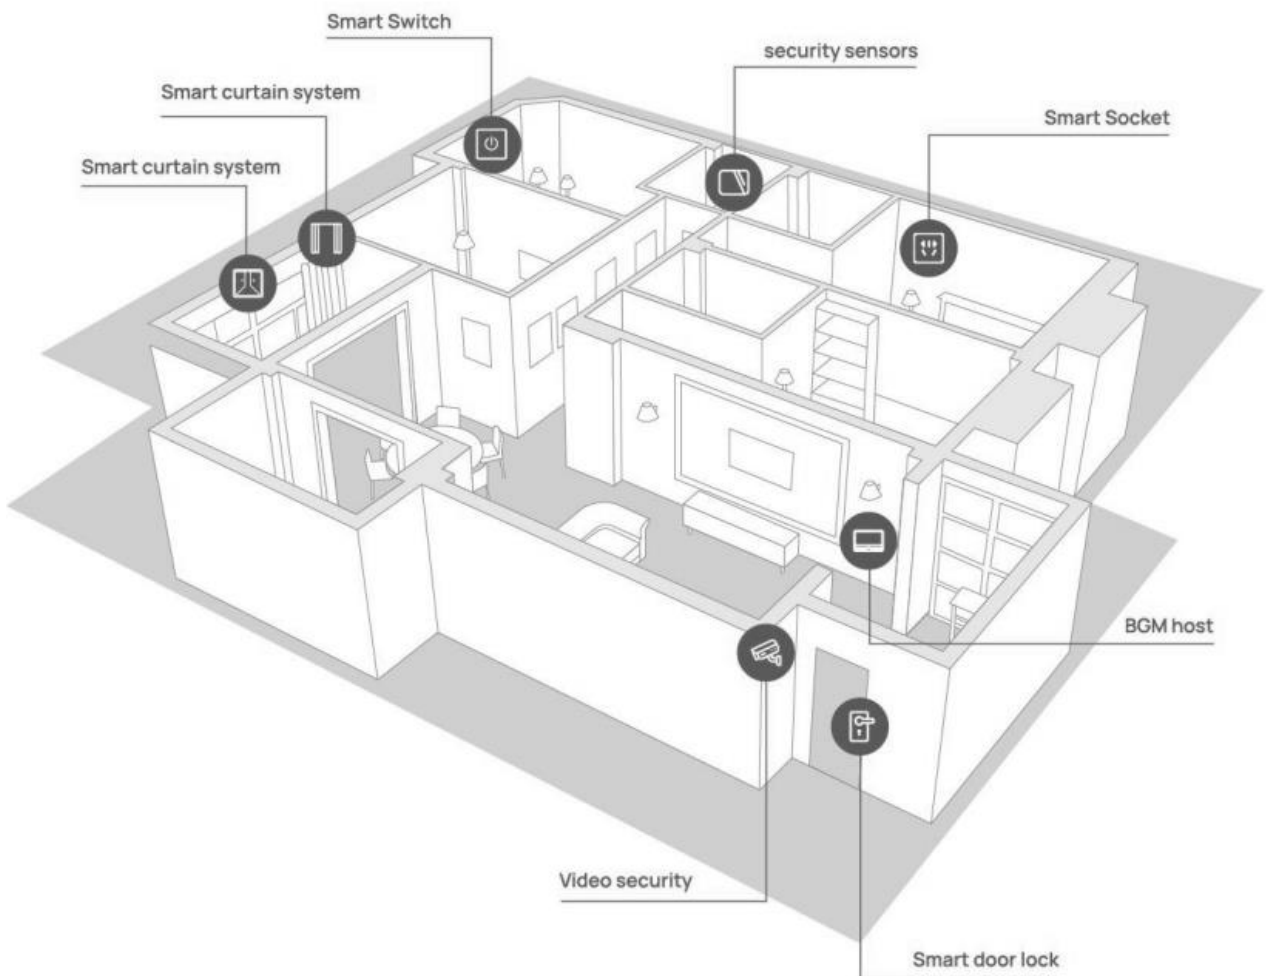

# ABOUT US

---

Mazzy Automations is a fully registered company that specializes in automation systems from design, supply, installation and services for both home and Industrial in South Africa and the world at large at very competitive prices. At Mazzy Automations we will always talk with our clients first and get a feel for what they want to achieve and how much they are thinking of spending, before we go off and design the best solution for both your budget and your needs. We will always try to find the best for you in terms of performance vs. cost.

We work closely with architects, designers, builders and cabinet-makers to ensure our solutions also look good, enhance your decor and are positioned as optimally as possible for good vision and audio. Mazzy Automations systems are easy to manage because we design, supply & install systems with technically robust and graphically consistent control interfaces that let you manage them wherever you are.



# OUR PRODUCTS

---



1

Smart  
switches

2

Blinds  
system

3

Gate  
systems

4

Garage openers

5

Ceiling  
speakers

6

Cameras

7

Alarm system

8

Door locks

9

Sensors



# SMART SWITCH



## Compatibility



WIFI



TIMER



ZIGBEE




VOICE



REMOTE

A smart switch is a switch connected to your home network that can control the functions of other household appliances and systems. It refers to physical switch that wirelessly connect and control other smart appliances where the smart switch is a traditional light switch managed remotely by smartphone app or a voice assistant or a device that facilitate the inclusion of non-smart appliances into your smart home ecosystem.

This type of smart switch acts as a middle-man, providing a voice or app-enabled interface to control traditional, non-connected devices. By plugging the non-smart device into the smart switch, it integrates that device into your smart home system, turning otherwise standard appliances into network connected smart devices.

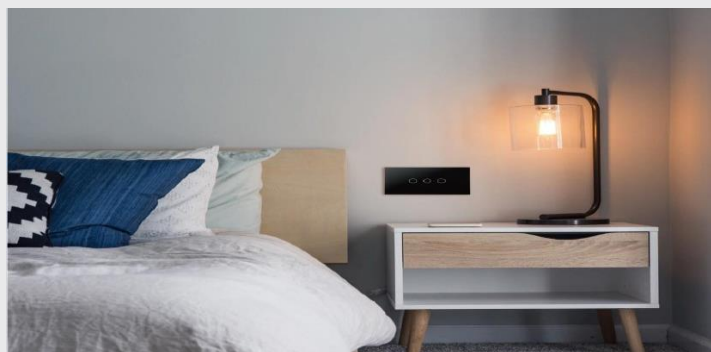

# SMART CURTAINS



Smart curtains are regular curtains, except fitted with a motor and allowing remote access within apps that control the curtains' placement depending on need. All in all, they're smart and intuitive devices. Smart curtains can be remote-controlled from your comfortable perch. With just a simple click or the tap of a button, your curtains will open and close with an elegantly smooth and silent motion. You can also set up a wireless wall switch operated with batteries, whether it's on the dining table, on the wall next to the door, or on your bedroom nightstand—anywhere you want.



# DOOR LOCKS




Smart locks can add both convenience and safety to your home. This convenience and safety are greatly enhanced when your lock is integrated into a larger home security system.

Smart locks are just one of many smart devices you can have in your home. These devices can be controlled and monitored remotely, as well as automated either by setting a time for them to activate or by creating an automated program that initiates several of them at once.



# CEILING SPEAKERS

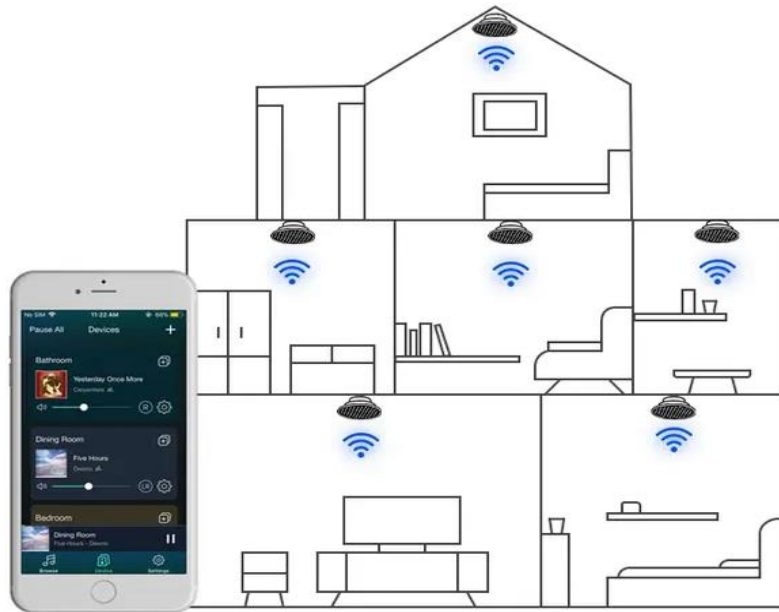

When there isn't enough room for floor supports to hold your wireless speakers, or you just want to be clutter-free and hide wires, then ceiling speakers are a great way to save space. Not only will you have fewer cables, but if you have swiveling ceiling speakers, you'll have more flexibility in where you place your furniture.

With no visible connections and only flush ceiling speaker grilles, the aesthetics are pleasing to the eye. You can also camouflage them how you want, whether placing them in a spot undetectable from prying eyes or one that is easy to cover. And if you are willing to invest a little more money, you can get in-ceiling speakers that are flush with the ceiling.

# DOORBELL



Motion detection



Infrared night vision



166°  
Wide Angle Lens



Two-way intercom

APP

Works with APP



Low-power  
rechargeable lithium  
battery



WIFI Connection



2 mega  
pixel HD camera

A smart doorbell camera allows you to see who's on the other side of your door—even when you aren't home. A doorbell camera is one of the easiest home security devices to install and allows you to have access to your home remotely in Real-Time.





# CAMERA



CCTV cameras provide outstanding security to all. It is simply one of the greatest inventions of the modern age. The following can be added to your home or business CCTV security systems and utilized through any mobile device when incorporated with our systems.

- Motion Detection
- Video Analytics
- Night Vision
- Instant, Remote Replays
- High-Level Resolution

## Surveillance Security Camera



Professional Box Camera



Dome Style Camera



Bullet Style Camera



P/T/Z Camera



Network Camera



Hidden Camera





# GARAGE OPENERS



A smart garage door allows you to control who accesses your home. If you're going to be away for the day and need to have a repairman stop by but can't rush home to let them in, you can use your smart garage door to open the garage and allow them access and close it again once the job is complete.




# Smart hotel solution for single bed room

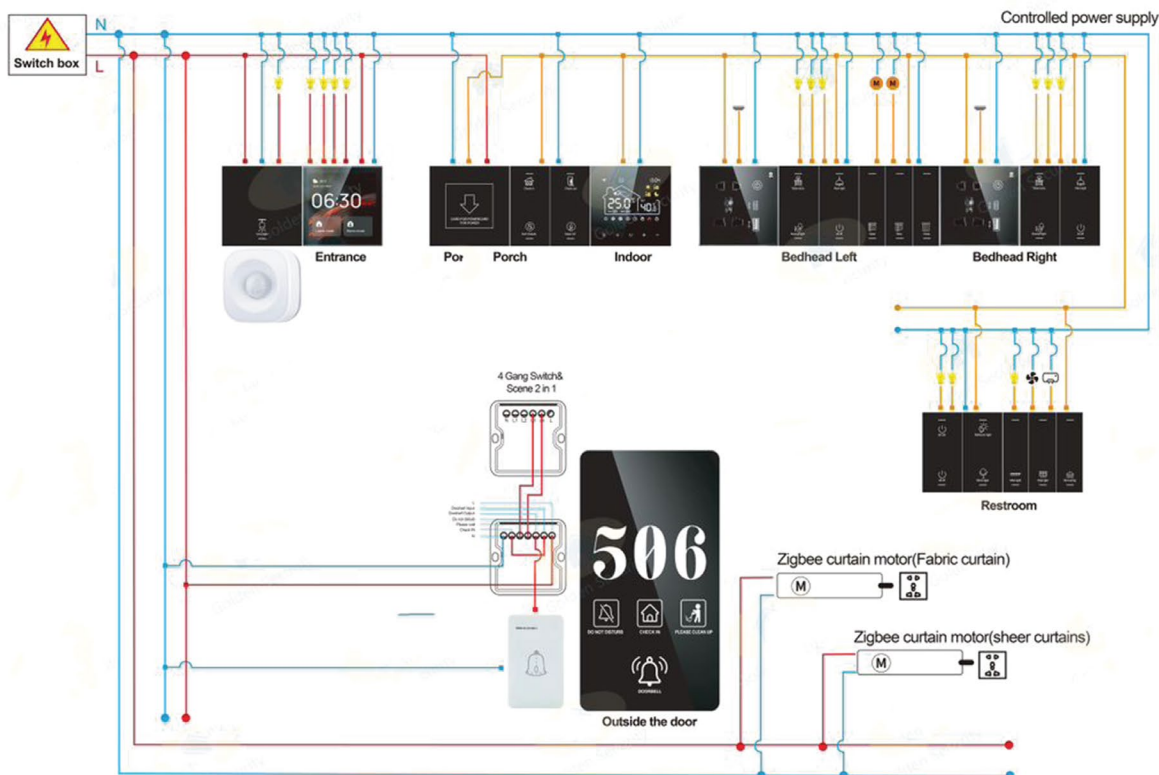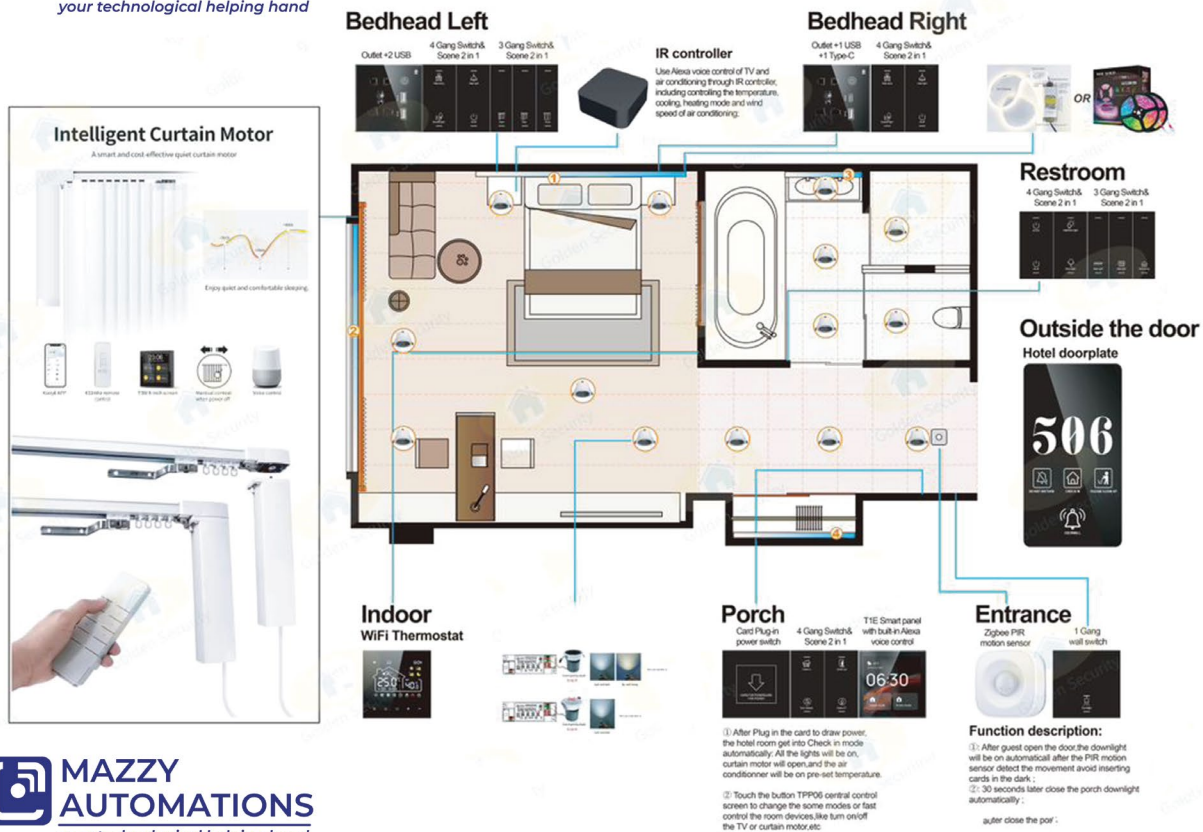



## Whole-house Smart Home System Working Diagram

Smart Wall Switches (N&L switch/Non-neutral line switch)

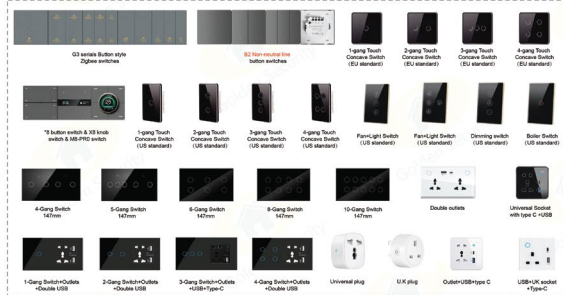

Newest smart screen+3.5 inch Touch switch



Smart Curtain Motor



Intercom Solution & Systems



Wired speakers & Bluetooth speaker



Central Control Gateway



Smart Thermostats



Mobile App Control Voice Control Smart Center Control Panel Smart Security Intercom Solution & Systems Smart Switches & Control Smart Lighting Smart Curtains Smart Locks & Sensors Background Music

Smart dimming system



Smart Door Lock



Smart hidden switch (Mini Smart switch module)



Smart Detector



Visual doorbell & Network cameras



### T Series Smart Screen

(EU) Standard



TPP06 3.5" smart screen with built-in 3 Gang switch & BLE MESH gateway

(EU) Standard alexa built-in



TIE 4" smart screen with built-in Alexa voice control

alex built-in (US) Standard



TSE 5" Smart screen Zigbee gateway with built-in alexa voice control

alex built-in




T2E Max 10.1" smart screen gateway with built-in Alexa voice control working with bluetooth speakers to play the music

(US) Standard

(EU) Standard

(Asian) Standard



### F Series Smart Screen



F1 4" control panel Zigbee gateway with built-in music amplifier



F6 6" control panel Zigbee gateway with built-in music amplifier and Aux port for TV



F8 8" panel Zigbee gateway With built-in music amplifier and Aux port for TV



F12 12" control panel Zigbee gateway with built-in music amplifier and Aux port for TV



(Asian) Standard



(Asian) Standard



(Asian) Standard



(Asian) Standard

## Catalog

	Page
Smart home control panels .....	1-6
Intercom solution & products .....	7
Smart sensors .....	8-9
Smart switches .....	10-19
Smart outlets .....	20-21
Smart curtain systems .....	22-23
Lighting dimming system .....	24-27
Smart control devices .....	28-29
Smart door lock .....	30-31
Intelligent Sweeping Robot .....	32
Smart thermostat .....	33-34
Tuya Security cameras .....	35-36
Tuya alarm systems .....	37-41


# Smart Home Control Panels

Our smart home system consists of smart central control screen gateway, smart lighting system, smart curtain system, background music player, smart control, security system, smart temperature control system and smart door lock system. The system can control home equipment through four ways: smart phone APP, voice control, central control screen control and setting automatic induction control, so as to realize the convenience and fun brought by technology.

## ZigBee Smart Home System Topology



## ZigBee transporting network

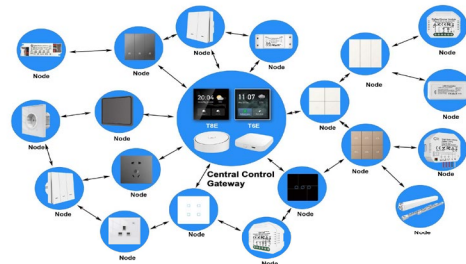























①Node (smart motor) 50 meters open Relay Node (Smart Switch) 50 meters open Relay node (smart socket)  
50 meters open transmitted by the gateway there are more link layers.  
②ZigBee is a wireless network protocol for low-speed short-distance transmission.



No.	Picture	Model	Features	Price (EXW)	Compatible devices
Multi-functional Smart home gateway (Smart life APP/Tuya APP)					
0	<p><b>NEW</b></p> <p>EU standard Desk Stand for central control screen</p>	GS-4CDH (Control panel accessories)	<p><b>EU standard Desk Stand for central control screen</b></p> <p>Suitable for model GS-TPP06, T1E-TPP01-Z, GS-T6E, GS-T2E-TPA10-M2E and T8E Control Panels.</p> <p>Purpose: Allow your smart home control panel to become a desktop controller (Live wire and neutral wire are needed to connect).</p> <p>Specifaation: Material: PC V0 Color: Gray</p> <p>Dimension: 121*88.50*67.50mm</p>		
1	<p><b>NEW</b></p> <p>Smart Control Panel Mini (Scene control + 3-gang relays + IR Built-in)</p>	GS-TPP06 (works with tuyu gateway)	<p><b>Smart Control Panel Mini</b> is a 2024 new released smart control panel mini version. It is a multifunctional interactive device that integrates a screen, three physical buttons, three relay channels, and infrared remote control.</p> <p><b>Specification:</b> Input: 100-240V, 50/60Hz Wireless protocol: WIFI, IR Max load ratings: Tungsten/Incandescent 200W Dimmable CFL/LED 200W Ballast/Fluorescent 200VA Working temperature: 0 °C ~40 °C Working Humidity: 5% ~90% RH non-condensing Product size: 86*86*11.5mm (base excluded) 86*86*35.50mm (base included) Net weight: 152.40g</p>		
2	<p><b>HOT SALE</b></p> <p>4" touch smart voice control panel with built-in Alexa (WiFi+Zigbee +BLE)</p>	T1E-TPP01-Z (Built-in tuyu gateway)	<p><b>T1E</b> is a Tuya smart central control panel integrated with Tuya smart home gateway + built-in Alexa voice control (English, Spanish, German &amp; French) + super Zigbee device compatibility + group dimming system.</p> <p><b>Main Features:</b> 1. A best alternative of tuyu ZigBee gateway at home, 100+ Zigbee sub-devices can be added in. 2. 3 Control modes at different distance with 3 themes 3. Multimedia interconnection function: Add smart doorbell and smart camera, which will show the screen outside the door when someone rings the bell, contributing a higher level of security to the family. 4. Support group wireless dimming lighting. Works with zigbee dimming driver, can realize single light and group lights dimming.</p> <p>alexabuilt-in</p>		







3	 <p>4 inch touch screen gateway (Zigbee&amp; WiFi)</p>	<p>GS-T6E (Built-in tuya gateway)</p>	<p><b>T6E is a tuya smart home gateway with 4 inch touch screen.</b>  <b>T6E comes with WiFi connection, ZigBee 3.0, added 99+ sub-devices</b>  1. Local control and local smart scene  2. Customize your home scene, one tap to run.  3. Supports working with zigbee alarm sensor, such as door sensor motion sensor to secure the house.  4. Can connect the tuya wifi video doorbell, and realize two-way communication.  5. Can be working with tuya smart camera, and view real-time monitoring on panel</p> <p><b>Specification:</b>  ①CPU:PX30 Quad core Cortex-A35;    ②OS: Android 8.1  ③RAM:1GB                                    ④ Screen:4 inch 480*480 Multi-touch  ⑤ROM:8GB                                   ⑥Bluetooth:BLE4.2 Single Point  ⑦Ethernet:N/A                               ⑧RS485: N/A  ⑨WiFi:2.4G                                   ⑩Wireless transmission:Zigbee</p>		
4	 <p>4 Inc full touch screen smart home gateway</p>	<p>T8E-Linux (Built-in tuya gateway)</p>	<p><b>T8E is a tuya smart home gateway with 4 inch touch screen.</b>  <b>T8E comes with WiFi and Ethernet connection, ZigBee 3.0, added 99+ sub-devices</b>  1. Local control and local smart scene  2. Customize your home scene, one tap to run.  3. Supports working with zigbee sub-device, such as zigbee wall switch, zigbee bulb, zigbee curtain motor, zigbee rolling shutter motor, etc</p> <p><b>Specification:</b>  * Built-in WiFi module  * Built-in Zigbee module  * Support RJ45 wired network.  * Support OTA remote upgrade  * Support of FlyThing UI makes development more convenient and efficient  * Support long time uninterrupted standby work, the motherboard does not heat, do not appear black screen of death  * 3 seconds startup speed, more quickly experience the wisdom scene</p>		
5	 <p>4" touch screen control panel with 2-way speakers</p>	<p>GS-F1 (Built-in tuya gateway)</p>	<p><b>F1 is a touch control panel integrated Tuya gateway capability, devices and scenes control, timing music playback and etc. It has 4" touch LCD screen and smart home central control.</b></p> <p><b>Features:</b>  *Tuya /Smart Life APP wireless remote control, IOS &amp; Android supported phone.  *Touch to control smart devices in the whole house ,making it easy to accurately control the equipment  *Create your smart own scene  * 2-way external speakers, and support one group audio input AUX.  *Customizable linkage scenes , touch the panel to quickly switch scene modes  *RS-485 Central Control Agreement  *Commonly used in hotels,home, apartment,store, spa and etc.  * Support local, TF card, U-disk and BLE, AUX play music.</p>		
6	<p><b>TOP SELLING</b></p>  <p>5" Touch screen control panel for smart home</p>	<p>GS-T5E-TPP05 (Built-in tuya gateway)</p>	<p>T5E is a Tuya smart central control panel integrated with Tuya smart home gateway + built-in Alexa voice control (English, Spanish, German &amp; French) + super Zigbee device compatibility + group dimming system.  Main features:</p> <ul style="list-style-type: none"> <li>- Built-in Zigbee Gateway</li> <li>- Built-in BLE Mesh</li> <li>- In-wall to replace a switch</li> <li>- Local control ( off-network)</li> <li>- Edge computing</li> <li>- Alexa Built-in</li> </ul> 		
7	<p><b>TOP SELLING</b></p> 	<p>F6-1 (Built-in 2 gang relay switch)</p>	<p><b>F6 is 6" touch screen music playback &amp; smart home control panel with built-in gateway.</b></p> <p><b>Key features:</b>  It comes with WiFi and Lan connection, ZigBee 3.0, added 100 sub-devices can be control.  *Customize your home scene, one tap to run.  *2-gang relay switch, support wire lights, fans,etc. (Model F6-2)  *Supports working with zigbee sub-device, such as zigbee wall switch, zigbee bulb, zigbee curtain motor, zigbee rolling shutter motor, etc.  *With a power amplifier, two wired speakers can be connected.  * Support audio input/output.  * Bluetooth receiving function. You can connect the host to play the music on the mobile phone through the Bluetooth of the mobile phone.  * With a physical button, short press to lock/off the screen; long press to shut down.  * With a TF card slot, it can read a maximum of 32G cards. With a TYPE-C interface and an adapter cable, it can read a U disk with a maximum of 32G.  * Can play local music and online music.  * With a knob. The knob can add equipment control equipment, such as air conditioners, curtains, light groups, and volume adjustment.</p>		
8	 <p>6" touch screen control panel with music play</p>	<p>F6-2 (Support 2-way wired speakers)</p>			
9	 <p>6" touch screen control panel</p>	<p>GS-S8 (Built-in tuya gateway)</p>	<p><b>S8 is a touch control panel integrated Tuya gateway capability, devices and scenes control, calendar and weather, alarm lock and etc. It has 6" touch LCD screen and a rotaryswitch for easy thermostat control and smart home central control.</b></p> <p><b>Features:</b>  *Tuya /Smart Life APP wireless remote control,IOS &amp; Android supported phone.  *Touch to control smart devices in the whole house ,making it easy to accurately control the equipment  *Create your smart own scene  *Timing Function  *6 inch Full touch screen operation display with rotary button  *Customizable linkage scenes , touch the panel to quickly switch scene modes  *RS-485 Central Control Agreement  *Commonly used in hotels,home, apartment,store, spa and etc.</p>		
10	 <p>7" touch screen control panel with gateway &amp; music play</p>	<p>GS-F7 (Built-in tuya gateway)</p>	<p><b>F7 is a tuya smart home gateway with 7 inch touch screen, Android operation system, supports music playback.</b></p> <p><b>Key features:</b>  It comes with WiFi and LAN connection, ZigBee 3.0, added 100 sub-devices  Local control and local smart scene  Customize your home scene, one tap to run.  Can support wired and bluetooth audio speakers, play music on with one-touch screen  upports working with zigbee sub-device, such as zigbee wall switch, zigbee bulb, zigbee curtain motor, zigbee rolling shutter motor, etc</p> <p><b>Specification:</b></p> <ul style="list-style-type: none"> <li>• Color: black</li> <li>• Operation system: Android 8.1</li> <li>• CPU: Quad-core Cortex-A35</li> <li>• CPU frequency: 1.5Ghz</li> <li>• Main screen size: 7 inch</li> <li>• Resolution: 1024*1600, IPS</li> <li>• Material: IPS (full viewing angle)</li> <li>• Touch screen: Multi-touch capacitive screen</li> <li>• Music format: MP3, WAV,WMA,FLAC,APE,ACC,AC3,OGG</li> <li>• Storage: 2GB</li> <li>• Expandable memory: 8 GB</li> <li>• USB: 2.0 interface, can read 32G</li> <li>• LAN port: Yes</li> <li>• WiFi: Yes</li> <li>• Bluetooth: 4.0</li> <li>• Resolution: 240*240</li> <li>• Product dimension: 235*111.60*11.50mm  </li> <li>• product weight: 0.499g</li> </ul>		

11	 <p><b>TOP SELLING</b></p>	<p>GS-F8-2CH (2-way wired ceiling speakers + 2-gang relay switch) -- <b>Speakers not in the box</b></p>	<p><b>F8 is a tuya smart home gateway with 8 inch touch screen, Android operation system, supports music playback.</b></p> <p>Key features: It comes with WIFI and Lan connection, ZigBee 3.0, added 100 sub-devices *Local control and local smart scene *Customize your home scene, one tap to run. *Can support wired and bluetooth audio speakers, play music on with one-touch screen *2-gang relay switch, support wire lights, fans,etc. *Supports working with zigbee sub-device, such as zigbee wall switch, zigbee bulb, zigbee curtain motor</p> <p><b>Specification:</b></p> <ul style="list-style-type: none"> <li>Color: grey</li> <li>Operation system: Android 8.1</li> <li>CPU: Quad-core Cortex-A35</li> <li>CPU frequency: 1.56ghz</li> <li>Main screen size: 8 inch</li> <li>Resolution: 1280*800</li> <li>Material: IPS (full viewing angle)</li> <li>Touch screen: Multi-touch capacitive screen</li> <li>Storage: 2GB</li> <li>Expandable memory: 8 GB</li> <li>USB: 2.0 interface, can read 32G</li> <li>LAN port: No</li> <li>WiFi: Yes</li> <li>Bluetooth: 4.0</li> </ul> <p><b>Packing information:</b> Product weight: 0.4kg Product dimension: 255*133*10mm Giftbox weight: 1.5kg Giftbox dimension: 342*213*73mm</p>		
12	 <p>8-Inc full touch screen smart home gateway</p>	<p>GS-F8-4CH (4-way wired ceiling speakers) --<b>Speakers not in the box</b></p>			
13	 <p>10" Touch Control Panel with Music Play (WiFi+Zigbee+Lan + <b>Wired ceiling speakers</b>)</p>	<p>GS-F10 (Built-in tuya gateway)</p>	<p><b>F10 is a tuya smart home gateway with 10 inch touch screen, Android operation system, supports music playback.</b></p> <p>Key features: It comes with WIFI and wifi connection, ZigBee 3.0, added 100 sub-devices *Local control and local smart scene *Customize your home scene, one tap to run. *Can support wired and bluetooth audio speakers, play music on with one-touch screen *2-gang relay switch, support wire lights, fans,etc. *Supports working with zigbee sub-device, such as zigbee wall switch, zigbee bulb, zigbee curtain motor, zigbee rolling shutter motor, etc.</p>		

14		GS-S9E (Built-in tuya gateway)	10" Touch screen control panel for smart home and music playback feature		
Multi-functional Smart home control panel Tuya Gateway + music center + intercom display 3 in 1					
<div>  <div> <b>Asian Standard</b>              Model: GS-T2E-TPA10-M2A         </div> </div> <div> <b>US standard</b>              Model: GS-T2E-TPA10-M2U         </div> <div> <b>EU standard</b>              Model: GS-T2E-TPA10-M2E         </div>					
15		GS-T2E-TPA10-M2A (Asian standard wall box)	<b>MAX</b> is a Tuya smart central control panel, Zigbee & Bluetooth independent chips, integrate Zigbee and Bluetooth gateway functions, support Bluetooth BLE & BLE mesh Sub-devices, and have edge capabilities for localized control.  Device control: Fully compatible device access and diversified control forms are compatible with almost all Tuya ecological devices.  Scene control: Customs physical buttons, screen interaction, and voice interaction can trigger scenes to meet different needs in life.  I-Share technology and T- Control Technology  Rich interface: A variety of base forms are supported, the standard base uses zero-fire wire wiring, supports dual relays, RJ45 network port and RS485.		 works with the Google Assistant works with amazon alexa
16		GS-T2E-TPA10-M2E (EU standard wall box)			 works with the Google Assistant works with amazon alexa
17	10" Touch Control Panel with tuya gateway+Music center+Intercom display 3 in 1	GS-T2E-TPA10-M2U (US standard wall box)			 works with the Google Assistant works with amazon alexa
18	2-gang relay switch & 2-way speaker    12" Touch Screen Music Playback & Smart home Control Panel	GS-F12 (Built-in tuya gateway)	F12 is 12.30" touch screen music playback & smart home control panel with built-in gateway.  Key features: It comes with WiFi and Lan connection, ZigBee 3.0, added 100 sub-devices can be control. * Built-in speakers, and also can connect external speakers/amplifier *Customize your home scene, one tap to run. *2-gang relay switch, support wire lights, fans,etc. *Supports working with zigbee sub-device, such as zigbee wall switch, zigbee bulb, zigbee curtain motor, zigbee rolling shutter motor, etc.  <b>Specification:</b> <ul style="list-style-type: none"> <li>● Split 4-inch voice control (Hello, Xiaoqi)</li> <li>● 12.3-inch IPS display screen, 1920*720 resolution</li> <li>● Support Tuya ZIGBEE gateway</li> <li>● System memory 2G, storage memory 8G</li> <li>● Android 11 system, quad-core processor, CPU: 1.8HZ</li> <li>● Power supply method: AC 110-250V (other power supply methods can be customized with a minimum order of 1K)</li> <li>● Lighting control: Two-way local lighting control 2*200 W ● Network: WIFI wired network</li> <li>● Bluetooth: Yes (transmission and interface)</li> <li>● 485 interface: support (music part)</li> <li>● Speaker output power: 2*25W (digital power amplifier)analog audio output (dual background music version can be connected to four speakers, the price plus \$4.00 for each)</li> <li>● One set of audio input; one set of output</li> <li>● One set of audio input; one set of output</li> <li>● Installation method: double 86/single 86 can be combined</li> <li>● Product weight: 1.5KG</li> <li>● Product size: 357MM×143.5MM×13.5MM</li> </ul>		
19	  Smart handheld touch screen gateway	GS-Z1 (Built-in tuya gateway)	<b>Z1</b> is a tuya handheld smart screen gateway, It can be held in hand and operated, and the flexible configuration mode can meet the needs of users in more smart home scenarios.  - 5 Kinds of devices control - One- click scene linkage, supports IR, Wi-Fi, Zigbee, Bluetooth and RF devices control. - Real-time scene synchronization - Support IR learning - Touch screen and key control		
20	  7" Touch screen music playback control panel (without gateway feature)	GS-A7	<b>GS-A7</b> is a music playback control panel, that support playback music and 8-way wired speakers. It also can be displayed the tuya smart devices ( wifi smart devices) ● 7-inch IPS display screen, 1024*600 resolution ● System memory 2G, storage memory 16G ● Android 8.1 system, quad-core processor, CPU: 1.5HZ ● Power supply mode: AC 110-250V/124/2V ● Output power: 8*20W (Yamaha digital power amplifier), two-zone sound effect adjustment, 4-way volume adjustment ● One set of audio input and one set of output ● Analog bass output: one set ● HDMI: output 1080P ● Network: WIFI ● Karaoke: support family Karaoke ● Bluetooth: support (connect mobile phone via BLE) ● Installation method: pre-embedded wire box, front mounted on the wall ● Product weight: 1.2KG ● Product size: 185*125*10.5MM  <b>Tips:</b> English version support Tuya App. Arabic, Polish only can be used as a music playback control panel, doesn't support IoT feature.		    Control panel doesn't include speakers.

21		GS-XDLB-VX5-C	<p><b>Main features:</b></p> <ul style="list-style-type: none"> <li>- Bass 5.25" polypropylene diaphragm, rubber surround, 12oz magnet, 25mm (1") voice coil.</li> <li>- Tweeter Natural silk dome diaphragm, 25mm (1") voice coil, ferrofluid cooling, NdFeB magnets.</li> <li>- Crossover Modified phenolic resin PCB board, -12dB/Oct low-pass filter, -12dB/Oct high-pass filter, treble PTC overload protection.</li> <li>- Resonant frequency 65Hz</li> <li>- Frequency response 50Hz-20KHz</li> <li>- Sensitivity 86dB/W/M</li> <li>- Recommended amplifier power 10-80W (rated power 40W)</li> <li>- Impedance 8Ω</li> <li>- Hole size 185mm(7.29")</li> <li>- Accessories Aluminum mesh, aluminum mesh hook, perforated template, spray paint card and instruction manual.</li> </ul> <p><b>The price is for one piece, and one box included 2 pieces, so the unit price should be multiplied by 2</b></p>		
22		GS-CH601	<p><b>Suitable for: hotels, exhibition halls, home living room, supermarkets, canteens, stores, script killing stores and other multi-scene applications.</b></p> <p><b>Ceiling speaker for: fixed resistance 8Ω, 30W;</b></p> <p>Function support: Bluetooth, U disk, TF card, AUX, TWS interconnection; Bluetooth version: Jerry program, Bluetooth 5.0; Transmission distance: straight line distance without blocking 12 meters; Battery capacity: no battery, can be connected to 12V power supply; Speaker size: 5 inch; Product size: Φ18.6*7cm; Opening size: Φ16-16.5cm; Single with packing weight: 0.8kg; Single box size: 21*21*9cm; Outer box size: 17*17*21cm; A box of 20 units, gross weight: 16.6kg, net weight: 16.0kg.</p> <p>Ceiling speakers are: full-frequency hi-fi speakers, no need for amplifier, direct Bluetooth connection, 1 host with up to 3 sets of subs, multi-scene application is recommended to shoot more than one set of hosts with the use of subs (TWS interconnect or with amplifier).</p>		
23		GS-S530-B	<p><b>Bluetooth Ceiling Speaker -Master speaker</b></p> <p>Product dimension: 200mm*85mm Installation dimension: 175mm*100mm FO: 63Hz Frequency response: 55Hz~20KHz Rated power: 20W Sensitivity: 90dB1W/1W Resistant: 5Ω</p>	S530-B Packing quantity: 12PCS Packing size: 51.5X51.5X32CM Packing weight: 20KG	
24		GS-S530	<p><b>Slave speaker</b></p> <p>Product dimension: 200mm*85mm Installation dimension: 175mm*100mm FO: 63Hz Frequency response: 55Hz~20KHz Rated power: 20W Sensitivity: 90dB1W/1W Resistant: 5Ω</p>	S530 Packing quantity: 12PCS Packing size: 51.5X51.5X32CM Packing weight: 19KG	
25		ZIG-01	<p><b>ZIG-01 is a Lan connection Ethernet (wired) smart home gateway. It supports all kinds of tuya smart Zigbee sub-devices, such as Zigbee wall switch, zigbee PIR human movement sensor, Zigbee temperature and humidity sensor, Zigbee curtain motor, etc.</b></p> <p><b>Parameter:</b></p> <ol style="list-style-type: none"> <li>1)Standard: IEEE 802.15.4</li> <li>2)Frequency: 2.4~2.485GHz</li> <li>3)Transmission rate: 250kbps</li> <li>4)Receiving sensitivity: -102dBm, PER&lt;10%</li> <li>5)Open area transmission distance: 100M to 200M</li> </ol> <ul style="list-style-type: none"> <li>- Power supply: 5V1A</li> <li>- Working temperature: -10~45℃</li> <li>- Wireless communication protocol: Lan connect + Zigbee</li> <li>- Product dimension: 60*60*15mm</li> </ul>	  	
26		GS-GW002	<p><b>This is a Multi-mode WiFi+Zigbee +Bluetooth smart home gateway. It supports all kinds of tuya smart Zigbee sub-devices, such as Zigbee wall switch, zigbee PIR human movement sensor, Zigbee temperature and humidity sensor, Zigbee curtain motor, etc.</b></p> <p><b>Parameter:</b></p> <ol style="list-style-type: none"> <li>1)Standard: IEEE 802.15.4</li> <li>2)Frequency: 2.4~2.485GHz</li> <li>3)Transmission rate: 250kbps</li> <li>4)Receiving sensitivity: -102dBm, PER&lt;10%</li> <li>5)Open area transmission distance: 100M to 200M 6) Support devices: 99+</li> </ol> <ul style="list-style-type: none"> <li>- Power supply: Micro-USB</li> <li>- Working temperature: -10~55℃</li> <li>- Wireless communication protocol: 2.4G wireless &amp; Zigbee &amp; BLE &amp; Mesh</li> <li>- Product dimension: 60*60*15mm</li> <li>- Weight: 33g</li> <li>- Communication protocol: WiFi+Zigbee+Bluetooth</li> </ul>	  	
27		BLE-G01	<p><b>ZigBee+Bluetooth Multimode Gateway</b> (with USB cable) One-key arm/disarm/sound and light alarm/voice prompt/doorbell/alarm clock/LED indicator adjustment/security SAAS</p> <ul style="list-style-type: none"> <li>- Support voice control</li> <li>- Support Google Home finger robot</li> <li>- Support Zigbee PIR movement sensor</li> <li>- Support Bluetooth humidity and temperature sensor</li> <li>- Zigbee blind curtain motor</li> </ul> <p>Parameter: - Power supply: 5V 1A - Working temperature: -10~45℃ - Wireless communication protocol: 2.4G wireless &amp; Zigbee &amp; BLE &amp; Mesh - Product dimension: 92*92*40mm - Product weight: 119g</p> <div> <p>Single weight: 179g Product size: 9.3*9.3*8.6 FCL weight: 10kg Outer box size: 51.5*51.5*23.50 packs</p> </div>	  	

<div data-bbox="203 107 397 336">     </div> <div data-bbox="211 399 397 415"> Matter Zigbee Wired gateway </div>	<div data-bbox="451 247 521 264"> GS-MZHUB </div> <div data-bbox="557 130 1024 386"> <p>This is a Multi-functional MATTER Wired Gateway. It supports both Tuya app and Apple Homekit App.</p> <ul style="list-style-type: none"> <li>- Can be acted as a Matter Gateway</li> <li>- Can be acted as a ZigBee Gateway</li> <li>- Works with Alexa, Google Home Assistant</li> <li>- Can support up to 128 smart devices</li> <li>- Lan network connection</li> </ul> <p>Internet of Everything: It can be seamlessly linked with smart home devices on various platforms. Whether it is lamps or sockets, Matter gateway can interconnect with them to provide agreed control and management.</p> <p>Specification</p> <ul style="list-style-type: none"> <li>- Power supply: Type C, Power input: 5V1A</li> <li>- Working temperature: -10~55℃</li> <li>- Wireless communication protocol: 2.4G wireless &amp; Zigbee</li> <li>- Product dimension: 60*60*15mm</li> <li>- Weight: 33g</li> <li>- Communication protocol: Zigbee, Thread</li> <li>- Size: 90mm*90mm*22mm</li> </ul> </div>
---	--

## Intercom Solution & Systems










Our smart home system consists of smart central control screen gateway, smart lighting system, smart curtain system, background music player, smart control, security system, smart temperature control system and smart door lock system. The system can control home equipment through four ways: smart phone APP, voice control, central control screen control and setting automatic induction control, so as to realize the convenience and fun brought by technology.


















No.	Picture	Model	Features	Price (EXW)	Compatible devices
1		<b>GS-T2E-TPA10-M2A</b> <b>CN/US standard</b>	<p><b>MAX</b> is a Tuya smart central control panel, Zigbee &amp; Bluetooth independent chips, integrate Zigbee and Bluetooth gateway functions, support Bluetooth BLE &amp; BLE mesh Sub-device, and have edge capabilities for localized control.</p> <p>Device control: Fully compatible device access and diversified control forms are compatible with almost all Tuya ecological devices.</p> <p>Scene control: Customs physical buttons, screen interaction, and voice interaction can trigger scenes to meet different needs in life.</p> <p>I-Share technology and T- Control Technology</p> <p>Rich interface: A variety of base forms are supported, the standard base uses zero-fire wire wiring, supports dual relays, RJ45 network port and RS485.</p> <p><b>Specification:</b></p> <ul style="list-style-type: none"> <li>• Color: grey</li> <li>• Operation system: Android 8.1</li> <li>• CPU: Quad-core Cortex-A35</li> <li>• CPU frequency: 1.5ghz</li> <li>• Main screen size: 8 inch</li> <li>• Resolution: 1280*800</li> <li>• Material: IPS (full viewing angle)</li> <li>• Touch screen: Multi-touch capacitive screen</li> </ul> <p><b>Storage:</b> 3GB  <b>Expandable memory:</b> 8 GB  <b>USB:</b> 2.0 interface, can read 32G  <b>LAN port:</b> No  <b>WiFi:</b> Yes  <b>Bluetooth:</b> 4.0</p> <p><b>Packing information:</b>  Product weight: 0.4kg  Product dimension: 255*133*10mm  Giftbox weight: 1.5kg  Giftbox dimension: 342*213*73mm</p>		   
2	<p><b>S212 Valla Outdoor Machine</b></p>	<b>S212</b>	<p>S212 enables you to make the video call with villa entrance door, and open the door remotely from indoor monitor or mobile APP. It also makes an easy integration with SIP devices.</p> <p><b>Key Features:</b></p> <ol style="list-style-type: none"> <li>1. Powered by PoE or power adapter (DC12V/2A)</li> <li>2. Support IC (13.56MHz) &amp; ID (125kHz) card</li> <li>3. Indicator Lights</li> <li>4. 2 relays supported</li> <li>5. Tamper alarm</li> </ol> <p><b>Physical:</b></p> <ul style="list-style-type: none"> <li>*System: Linux</li> <li>*RAM: 64 MB</li> <li>*ROM: 128 MB</li> <li>*Front Panel: Aluminum</li> <li>*Power Supply: PoE (802.3af) or DC 12V/2A</li> <li>*Standby Power: 1.5 W</li> <li>*Rated Power: 3.5 W</li> <li>*Camera: 2MP, CMOS</li> <li>*Indicator Light: 3</li> <li>*Wiegand Port: Support</li> <li>*Ethernet Port: 1 x RJ45, 10/100 Mbps adaptive</li> <li>*Door Entry: IC (13.56MHz) &amp; ID (125kHz) card</li> <li>*Reset Button: 1</li> <li>*RS485 Port: 1</li> <li>*Relay Out: 2</li> <li>*Input: 2</li> <li>*IP/IK Rating: IP65 / IK08</li> </ul> <p><b>Audio</b></p> <ul style="list-style-type: none"> <li>*Audio Codec: G.711</li> <li>*Echo Cancellation</li> <li>*DTMF: RFC2833</li> <li>*Microphone: Built-in microphone</li> <li>*Speaker: Built-in speaker</li> </ul> <p><b>Video</b></p> <ul style="list-style-type: none"> <li>Video Codec: H.264</li> <li>Video Resolution: 1280 x 720</li> <li>Viewing Angle: 110° (H) / 60° (V) / 125° (D)</li> <li>Max. Image Transfer Rate: 720p - 25fps</li> <li>Light Compensation: LED white light</li> </ul> <p><b>Networking:</b> Protocol: ONVIF, SIP, UDP, TCP, RTP, RTSP, NTP, DNS, HTTP, DHCP, IPV4, ARP, ICMP</p> <p>*Installation: Surface Mounting  *Surface Mounting DIM: 168 x 88 x 34 mm  *Working Temperature: -40°C to +55°C  *Storage Temperature: -40°C to +70°C  *Working Humidity: 10% to 90% (non-condensing)</p>		<p>Package Features</p> <p>Package Content:</p> <ul style="list-style-type: none"> <li>- DNAME S212 (Power adapter not included)</li> <li>- Bracket</li> <li>- Screwing Kit</li> <li>- Quick Start Guide</li> </ul> <p>Qty/CTN: 12 pcs  N.W/PCS: 0.71 kg  G.W/CTN: 11.08 kg  Giftbox Size: 215 x 135 x 73 mm  Carton Size: 470 x 235 x 295 mm</p>
3	<p><b>Apartment Machine/Apartment station</b></p>	<b>PD06</b>	<p>S215 enables you to make the video call with apartment entrance door, and open the door remotely from indoor monitor or mobile APP. It also makes an easy integration with SIP devices and lift control system.</p> <p><b>Key Features</b></p> <ul style="list-style-type: none"> <li>*Induction loop for hearing impaired</li> <li>*Braille dot for visually impaired</li> <li>*3 output relays for door locks</li> <li>*Tamper alarm</li> <li>*Support IC (13.56MHz) &amp; ID (125kHz) card, PIN code</li> </ul> <p><b>Physical</b></p> <ul style="list-style-type: none"> <li>*System: Linux</li> <li>*Front Panel: Aluminum</li> <li>*Button: Mechanical</li> <li>*Power Supply: PoE (802.3af) or DC 12V/2A</li> <li>*Standby Power: 1.5 W</li> <li>*Rated Power: 9 W</li> <li>*Camera: 2MP, CMOS</li> <li>*IR Sensor: Support</li> <li>*Wiegand Port: Support</li> <li>*Ethernet Port: 1 x RJ45, 10/100 Mbps adaptive</li> <li>*Door Entry: IC (13.56MHz) &amp; ID (125kHz) card, PIN c</li> </ul> <p><b>Display</b></p> <ul style="list-style-type: none"> <li>Display: 4.3-inch TFT LCD</li> <li>Resolution: 480 x 272</li> </ul> <p><b>Audio</b></p> <ul style="list-style-type: none"> <li>Audio Codec: G.711</li> <li>Echo Cancellation</li> <li>DTMF: RFC2833</li> <li>Microphone: Built-in microphone</li> <li>Speaker: 80 / 1W</li> </ul> <p>*Reset Button: 1  *RS485 Port: 1  *Relay Out: 3  *Input: 4  *IP/IK Rating: IP65 / IK08  *Installation: Surface Mounting  *Surface Mounting DIM: 295 x 133 x 42.7 mm  *Working Temperature: -40°C to +55°C  *Storage Temperature: -40°C to +70°C  *Working Humidity: 10% to 90% (noncondensing)</p> <p><b>Networkings:</b> Protocol: ONVIF, SIP, UDP, TCP, RTP, RTSP, NTP, DNS, HTTP, DHCP, IPV4, ARP, ICMP</p>		<p>Video Codec: H.264  Video Resolution: 1280 x 720  Viewing Angle: 110°(H) / 67°(V) / 127°(D)  Max. Image Transfer Rate: 720p - 25fps  Light Compensation: LED white light</p> <p><b>Package Features</b></p> <p>Package Content:</p> <ul style="list-style-type: none"> <li>- DNAME S215 (Power adapter not included)</li> <li>- Surface Mounting Box</li> <li>- Screwing Kit</li> <li>- Quick Start Guide</li> </ul> <p>Qty/CTN: 10 pcs  N.W/PCS: 1.53 kg  G.W/CTN: 20 kg  Giftbox Size: 362 x 170 x 100 mm  Carton Size: 490 x 420 x 450 mm</p>



## Smart Sensors/IR Controllers


No.	Picture	Model	Features	Price (EXW)	Compatible devices
17		GS-HP-WIFI	Product name: PIR and microwave sensor 1.Wireless technology:Zigbee/WIFI 2.Work voltage:DC12V 3.Work Current: <70mA 4.Work temperature:-20℃~+70℃ 5.Sensitivity:0~9(Default:7) 6.Detect distance:0.3~9m(Default distance 6m) 7.Delay time:①target detection confirmation time:0~10s ②target disappearance delay time:0.5s~25min.It is recommended not to be less than 15 seconds. If too small,easy to miss 8.Light sense:0~2000lux 9.Installation mode:ceiling 10.Product Size:93*30		
18		GS-HP-ZIGBEE			
19		GS-RDR-WIFI	Product name: PIR and microwave sensor 1.Wireless technology:Zigbee 2.Work voltage:+5V 3.Channel number: CH1-CH26 4.Work temperature:-20℃~+60℃ 5.Transmitted power:2dBm 6.Working frequency:10.525Ghz ①Human Body movement ,movement detection function. ②Human body still detection,if somebody is still,there is no movement,like sitting,sleeping,reading,the microwave sensor is also can detect there is no movement. ③presence time detection,the microwave sensor can detect the time someone is existed. ④No presence Time detection,the microwave sensor can detect the exact time no one is existed.		Product size:85MM*85MM*27MM
20		GS-RDR-ZIGBEE	Product name: PIR and microwave sensor 1.Wireless technology:Zigbee 2.Work voltage:+5V 3.Channel number: CH1-CH26 4.Work temperature:-20℃~+60℃ 5.Transmitted power:2dBm 6.Working frequency:10.525Ghz ①Human Body movement ,movement detection function. ②Human body still detection,if somebody is still,there is no movement,like sitting,sleeping,reading,the microwave sensor is also can detect there is no movement. ③presence time detection,the microwave sensor can detect the time someone is existed. ④No presence Time detection,the microwave sensor can detect the exact time no one is existed.		Product size:85MM*85MM*27MM
21		GS-PIR	zigbee series Infrared human body sensor		
22		GS-ZP001- Zigbee	Zigbee infrared human sensor requires Tuya ZigBee gateway. Detection distance: 5 m Detection angle: 150 degrees Battery specifications: AAA1.5V x 3 Working temperature: -10-45℃ Working humidity: 10%-90%RH (no condensation)		
23		GS-ZP001- WIFI	Detection distance: 5 m Detection angle: 150 degrees Battery specifications: AAA1.5V x 3 Working temperature: -10-45℃ Working humidity: 10%-90%RH (no condensation)		
24		GS-HW04-WIFI	Detection distance: 5 m Installation: Wall mounting/ceiling mounting Detection angle: 150 degrees Power supply: 5V 2A ( USB can not be used with d Working temperature: -0-30℃ Working humidity: 10%-90%RH (no condensation) Product dimension: 50*48*48 ( mm )		Each product weight and dimensions: Size: 61*61*27mm Gross weight: 80g Net weight: 79g Weight and size of one box of products: (200PCS) Size: 66*34*22cm Gross weight: 18kg Net weight: 17.4
25		GS-HW04-Zigbee	Detection distance: 5 m Installation: Wall mounting/ceiling mounting Detection angle: 150 degrees Power supply: 5V 2A ( USB can not be used with d Working temperature: -0-30℃ Working humidity: 10%-90%RH (no condensation) Product dimension: 50*48*48 ( mm )		
26		UFO-R6	<b>Wi-Fi remote controller with 5V 1A USB power charger</b> Working Humidity: <85%RH Power Input: 5V DC 1A(Micro USB) IR Distance:<8m Working Temperature: 0-50℃ Size:2.6in*2.6in*1.06in 65mm*65mm*27mm		
27		UFO-R1-RF	<b>WIFI IR+RF remote controller</b> Working Humidity: <85%RH Power Input: 5V DC 1A(Micro USB) IR Distance:<8m Working Temperature: 0-50℃ RF: 433mhz/315mhz		
28		UFO-R11	Input power: 3A battery x2 Standby power: <0.5W Control distance: <8m (finally affected by the environment) Infrared frequency: 38KHz Working temperature: 0℃~50℃ Working humidity: <85% RH (no condensation) Wireless protocol: Zigbee Executive standard: GB/T19254-2008 Product Size: 68x68x27mm		













29	 WiFi IR remote controller for TV/AC	GS-Z06-WIFI	WiFi IR remote controller for TV/AC Unit weight: 26g LED indicator: blue Infrared range: less than 10m Size: 50*50*19mm Type C input: DC5V/1A Infrared frequency: 35KHz WiFi frequency: IEEE802.15.4, 2.4GHz		Product size: 50*50*19mm Color box size: 100*64*25mm Qty: 100/pcs per box Outer box size: 385*285*330mm Product net weight: 70g Product gross weight: 75g Outer box gross weight: 8kg
30	 Zigbee IR remote controller for TV/AC	GS-Z06-Zigbee	Zigbee IR remote controller for TV/AC Unit weight: 26g LED indicator: blue Infrared range: less than 10m Size: 50*50*19mm Type C input: DC5V/1A Infrared frequency: 35KHz Zigbee frequency: IEEE802.15.4 Remark: needs to work with tuya zigbee gateway.		
31	 ZigBee Repeater for Extend signal Zigbee 3.0	GS-ZR	ZigBee Repeater for Extend signal Zigbee 3.0 - Works with tuya gateway - Forwarding Zigbee signal  Specification: - Power input: 5V1A - Operating voltage: 1.8V ~3.8V - Transmist: 10dB - Operating temperature: -10℃~50℃ - Frequency: 2.400~2.483GHz - Wireless Protocol: ZigBee		
32	 Temperature and humidity sensor	GS-KCTW12-01	Product Name: ZigBee Temperature Humidity Sensor Wireless protocol: ZigBee Temperature measurement range: -10℃~50℃ Humidity measurement range: 0%-99%RH Working voltage: DC2.4V~3V Battery specification: CR2032 button cell Product size: φ60×16.7mm(ROUND)/16.7×60×60mm(SQUARE) Screen size: φ46.5mm(ROUND)/46.5×46.5mm(SQUARE) Product net weight: 42g(ROUND)/49.5g(SQUARE)		Package List: Temperature Humidity Sensor*1 Product manual*1 Wall sticker*1
33	 Water leak detector sensor	GS-QY-WL-C-MS	Product name: Type: Water Level Alarm Power Supply: 3V 1*CR2032 Standby Time: 2 years Protocol: ZigBee APP: Tuya smart/smart life Support systems: Android and IOS Waterproof: IP66 Material: ABS Operating Temperature: -10℃~+55℃ Item Size: 50*18mm		
34	 Tuya ZigBee SOS Button Alarm	GS-Z-SOS	Specifications: Battery: CR2032 Working temperature: -20℃~60℃ Working humidity: ≤95%RH (non-condensing) Emission frequency: 100Bm Emission current: peak value 45mA, average 1~2mA Quiescent current: 2~3uA Emission distance: 100m+(Open space) Wireless frequency: Zigbee 2.4GHz		
35	 wireless door/window sensor	ZSS-JM-GWM	Specifications: Wireless Technology: ZigBee Working Voltage: 2.4V~3.3V(CR2032 battery) Transmission Frequency: 2.4GHz Working Temperature: -20℃~+60℃ 0%~95%RH Transmission Range: Indoor: 10~30m/Outdoor: 30~50m Size Main Body: 40*25*12mm Size Small Body: 25*10*9mm Package list: Sensor*1 User Manual*1		
36	 Zigbee door and window vibration sensor	ZSS-Z-VBR	Characteristic: 1. Realize remote control on Smart Life APP through mobile phone network or WIFI. 2. Real-time monitoring of device changes, push notifications when sensing device movement, drop, impact, vibration and other state changes, and use it with other Tuya Zigbee or WIFI devices to realize automatic scene applications. 3. Use with Zigbee gateway Parameters: Working voltage DC 3V Quiescent current ≤10uA Alarm current ≤20mA Communication method Zigbee Transmission distance 10~30m (indoor without shelter) LED indicator: YES Installation method: 3M glue or screw fixing Battery: AAA alkaline battery 1.5V*2 Working temperature: -10℃~50℃ Working humidity: ≤95% (no condensation) Reporting frequency: half an hour		
37	 WiFi Door/Window alarm	GS-D41	1. support tuya smart APP 2. support google home & amazon alexa 3. door open alert, app notification 4. real time monitoring for in & out at the quarantine places. 5. App remote monitoring, multi-level prevention and control 6. installation distance: ≤2cm 7. trigger range: 2-3cm 8. Operating temperature: -0℃~+50℃	1. Working voltage: 3V (2*AA battery) 2. Working current: ≤19-59mA 3. standby current: ≤35uA 4. connect method: wifi (802.11b/g/n) 5. wifi range: 30m	
38	 Wireless Strobe Siren Alarm	WIFI-SLA-U	Sound and light flash siren (USB type), Zigbee version and WIFI version for option		Single weight: 110g Product size: 8.5*5*9.5 FCL weight: 4.8kg FCL size: 45*27*21 50 packs
39		ZIGBEE-SLA-U			
40	 WiFi gas leakage detector	GS21	1.77" TFT color display, Tuya APP remote push, Sound and light alarm, real voice prompt, mobile phone alarm push. Perpetual calendar, real-time ambient temperature and combustible gas display, Combustible gas alarm, High temperature alarm (alarm threshold can be set), Green power indicator Light, red alarm indicator, yellow sensor fault indicator, yellow life indicator, Test/silence button, Support Chinese and English, Alarm linkage solenoid valve/manipulator external air cut-off device.  Detecting gas type: (natural gas and LPG)		

41	 <p>WiFi Smoke Alarm</p>	GS443W	<p>Tuya cloud platform APP alarm information push. High sensitivity, low power consumption, strong stability. Ultra long life battery power supply. Install to use, no wiring plug trouble. Ceiling installation. Live alarm with ultra loud buzzer. 360°all-round alarm. ABS flame retardant shell material. Using high-performance microprocessor.</p> <p><b>Specification:</b> Power supply: DC9Valkaline battery (6LR61/9V) Quiescent current: &lt;10uA(wifi) &lt;20uA(independent) Alarm current: &lt;100mA(wifi)&lt;150mA(independent) Sensitivity:0.05~2.0dB/m(independent) Working temperature: 0~+50° C Relative humidity: ≤95%RH, no condensation Alarm sound:&gt;80db Battery low voltage alarm:&lt;7.0V± 0.2V Product size: 107x107x48mm(LxHxD)</p>		
42	 <p>Zigbee Smoke alarm</p>	GS-441SM	<p>Smart Zigbee Photoelectric smoke fire alarm detector (9V battery)</p> <ul style="list-style-type: none"> <li>- Be compatible with Amazon Alexa/Google home assistant</li> <li>- Strong anti-interference</li> <li>- Real-time detection</li> <li>- Zigbee communication</li> <li>- Mobile phone app Alarm</li> <li>- Smoke detection alarm</li> <li>- 85Db high decible alarm</li> <li>- Low power consumption</li> </ul> <p>Wireless protocol: ZigBee 3.0 Transmitting power: 10dbm Operation voltage: DC9V Operation Temperature: -10 °C: +55 °C Alarm sound level: 80dB (in front 3m) Detection range: 50 sqm</p>		
43	 <p>WiFi Natural Gas Alarm Detector</p>	GS-210W	<p><b>Product features</b></p> <ul style="list-style-type: none"> <li>- Real-time reporting of alarm concentration.</li> <li>- With voice prompt alarm function.</li> <li>- Support push gas alarm to the doud.</li> <li>- Support remote self-inspection of device.</li> <li>- Anti-electromagnetic interference, anti-radio frequency interference.</li> </ul> <p><b>Technical parameters</b> Quiescent current:&lt;150mA Alarm current:&lt;300mA Alarm sound:&gt;80dB Operating temperature:-10°~55°C Relative humidity:≤93%RH Size:99.5x99.5x34mm(LWxT)</p>		







# Zigbee/WIFI Smart Wall Switches



















No.	Picture	Model	Features	Price (EXW)	Compatible devices
<p><b>FAQ about T3E smart wall switch &amp; scene panel 2 in 1:</b></p> <p><b>1. What place can be installed this smart multi-function touch switch?</b> This multifunctional switch can be installed in smart villas, smart meeting rooms, smart offices, smart coffee shops, smart hotels and other places.</p> <p><b>2. Can this product be used alone?</b> If used alone, it can only be used as a conventional switch, and cannot be used as a scene panel to control curtains, air conditioners and scene control full open and full open modes. But it also can be acted as a scene panel after connecting to a tuya gateway.</p> <p><b>3. Is there any special function?</b> Yes, T3E can realize localized control, and the general gateway has no localized control function. That is, when there is no network, the user cannot control the smart device through the mobile APP or the gateway, so the experience is not good. However, if our T3E switch and scene panel are installed, users can still use T3E to control local devices and use scenes.</p> <p><b>4. Can T3E provide WIFI version?</b> Due to the limitation of the software protocol, T3E currently only has the Zigbee version. At the same time, we are also developing a version of WIFI Mesh T3W, this version is not based on the Tuya app, it is based on our self-developed APP. For more information, please contact our sales representative.</p> <p><b>One switch can be used as four products</b> T3E, Make smart life smarter and simpler</p> <p>Smart switch and scene panel 2 in 1 = 1x 3-way switch + 4x scene stickers + 1x A/C controller + 1x curtain controller</p>					
31		Zigbee version T3E-EU1-ZI	<p>This is a 4 inch touch screen smart wall switch with 1-4 gang relays that can be connected to lights. Wireless Zigbee connection with the smart home gateway. It can be acted as a scene panel to control the Zigbee smart light switch, smart curtain, AC etc.</p> <ol style="list-style-type: none"> <li>Compatible with European standard wall boxes, simple in wall installation.</li> <li>4-inch HD LCD, IPS, multi touch screen.</li> <li>With Dimmer switch and scene panel function, connect with the zigbee gateway.</li> <li>Control the lights, curtains, air conditioners, and all others smart home devices. Configure Smart Home scenes in the APP, turn on the scene mode with one touch on the screen</li> <li>0 to 10V dimming. Just connect the lights or lamp with 0 to 10V dimming control box, and T3 control box connect with 4 inch touch pad.</li> <li>1 Gang smart switch with build in 1 relays</li> </ol>		<p>Multi-model gateway</p> <p>Wall switch &amp; scene panel</p>
32		Zigbee version T3E-CN2-Z2	<p>This is a 4 inch touch screen smart wall switch with 1-4 gang relays that can be connected to lights. Wireless Zigbee connection with the smart home gateway. It can be acted as a scene panel to control the Zigbee smart light switch, smart curtain, AC etc.</p> <ol style="list-style-type: none"> <li>Compatible with CN/Asian standard wall boxes, simple in wall installation.</li> <li>4-inch HD LCD, IPS, multi touch screen.</li> <li>With Dimmer switch and scene panel function, connect with the zigbee gateway.</li> <li>Control the lights, curtains, air conditioners, and all others smart home devices. Configure Smart Home scenes in the APP, turn on the scene mode with one touch on the screen</li> <li>0 to 10V dimming. Just connect the lights or lamp with 0 to 10V dimming control box, and T3E control box connect with 4 inch touch pad.</li> <li>Temperature color and brightness dimming feature, the below wired 0 to 10V Dimming Power Driver is needed.</li> </ol>		<p>Multi-model gateway</p> <p>Wall switch &amp; scene panel</p>
33		T3-E			<p>Multi-model gateway</p> <p>Wall switch &amp; scene panel</p>
34		T3E-4	<p><b>Multi-functional Smart Scene Panel (3-gang relay switch)</b></p>		
35		EUP10A-1HMC-120/350 (8 current gear mini models) (version 201)	<p>Input Voltage: 100-240V (R can only adjust the brightness of the light) Input Voltage: 8-42V Dimming Mode: 0-10V Version: 201 Number of Channels: 1 10W Product size (mm): 110*30*22 <b>0-10V dimming system work with T3E-CN2-Z2 and T3E-EU1-ZI</b></p>		
36		EUP12A-2HMC-1 (version 101)	<p>Input voltage: 100-240V (R can adjust the brightness and color temperature of the light) Output voltage: 8-42V Dimming method: 1-10V DC Number of channels: 2 12W <b>0-10V dimming system work with T3E-CN2-Z2 and T3E-EU1-ZI</b></p>		Not available



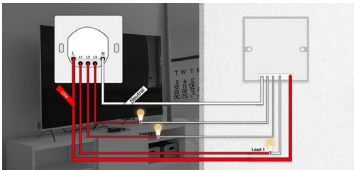

37		<b>EUP24A-1H24V-1</b>	<p>Frequency: 50/60Hz Efficiency: &gt;85%@230VAC, full load Power factor: &gt;0.95@230VAC, full load THD: &lt;10%@230VAC, full load Model: EUP24A-1H24V-1</p> <p>Input voltage: 220VAC-240VAC Output channel: 1 Output voltage: 24VDC Output current: 1A Output power: 24W</p>	
0 to 10V Dimming Power Driver for light strip				

Smart Switch Module (WiFi & ZigBee for option)				
38	 Classic dimming knob switch + scene button 2 in 1	GS-X3	<p>Classic dimming knob switch + scene button 2 in 1</p> <p>GS-X3 is a multi-functional knob switch with 2-gang relay switch and 2-way scene control. It works with tuya gateway, can be controlled through smart phone App.</p> <p><b>Main features:</b></p> <ul style="list-style-type: none"><li>- Light dimming feature: cold and warm color dimming for lights</li><li>- Acting as a 2-gang relay switch to control lights on/off</li><li>- Can set 2-way scenes control on the button, self-define intelligent linkage scenes, and quickly switch to scene mode and lighting mode.</li><li>- Different colors for option</li><li>- Asian wall box design, 86*86mm type</li></ul> <p><b>Specification:</b></p> <p>Power supply: Live &amp; Neutral Wire Voltage: AC220V 50Hz Statistics power consumption: 0.5W Communication frequency: 2.4g Communication protocol: ZigBee Key mode: Capacitive touch Material: PC material</p>	
	 ZigBee 1 Gang Rotary Dimmer Switch (L+N)	GS-T2-Z66	<p>ZigBee 1 Gang Rotary Dimmer Switch (L+N)</p> <p>Standard EU/UK Color: White/Black/Gold available Input: 100-250V ~50/60HZ Output: 250W 10 level dimmable</p>	
	 ZigBee 1 Gang Rotary Fan Switch (L+N)	GS-T2-Z67	<p>ZigBee 1 Gang Rotary Fan Switch (L+N)</p> <p>Standard EU/UK Color: white/Black/Gold available Input: 100-250V ~50/60HZ Output: 250W 5 speed control</p>	
Smart Switch Module (WiFi & ZigBee for option)				
39	 WiFi smart switch	GS-101	<p>Input voltage: 90-250V AC 50/60HZ Maximum power: 2200W/10A Single weight: 51g Product size: 9.1*4.2*2.5cm FCL weight: 11.5kg FCL size: 38*22*30cm 200 packs</p>	<p>Single weight: 54g Size: 5.9*5.3*2.8cm FCL weight: 17.2kg FCL size: 36.5*28*28.5cm 300 packs</p>
40	 ZigBee Hidden smart switch 1-Gang with RF433MHz	GS-MS-104Z	<p>Hidden breaker 1 GANG</p> <ol style="list-style-type: none"><li>1. Small size, hidden in the switch box</li><li>2. The traditional switch and the smart switch operate independently, Do not interfere with each other</li><li>3. Can be used for dual control switch, Two switches control the same light</li><li>4. Can control 1-way dual-control switch</li></ol> <p>Input voltage: 90-250V AC 50/60H Maximum current: 10A</p>	<p>Single weight: 54g Size: 5.9*5.3*2.8cm FCL weight: 17.2kg FCL size: 36.5*28*28.5cm 300 packs</p>
41	 Zigbee Hidden smart switch 2-Gang with RF433	GS-MS-104BZ	<p>Hidden breaker 2 GANG</p> <ol style="list-style-type: none"><li>1. Small size, hidden in the switch box</li><li>2. The traditional switch and the smart switch operate independently, Do not interfere with each other</li><li>3. Can be used for dual control switch, Two switches control the same light</li><li>4. Can control two-way dual-control switch</li></ol> <p>Input voltage: 90-240V AC 50/60HZ Maximum current: 10A total</p>	<p>Single weight: 54g Size: 5.9*5.3*2.8cm FCL weight: 17.2kg FCL size: 36.5*28*28.5cm 300 packs</p>
42	 Zigbee Hidden smart switch 3-Gang without RF	GS-MS-104CZ	<p>Hidden zigbee switch 3 GANG</p> <ol style="list-style-type: none"><li>1. Small size, hidden in the switch box</li><li>2. The traditional switch and the smart switch operate independently, Do not interfere with each other</li><li>3. Can be used for dual control switch, Two switches control the same light</li><li>4. Can control 3-way dual control switch</li></ol> <p>Input voltage: 90-240V AC 50/60HZ Maximum current: 10A total</p>	<p>Single weight: 54g Size: 5.9*5.3*2.8cm FCL weight: 17.2kg FCL size: 36.5*28*28.5cm 300 packs</p>
43	 ZIGBEE SCR dimming controller (one way)	GS-MS-105Z	<p>Hidden Dimming ZIGBEE Switch</p> <ol style="list-style-type: none"><li>1. Small size, hidden in the switch box</li><li>2. The traditional switch and the smart switch operate independently, Do not interfere with each other</li><li>3. Can be used for dual control switch, Two switches control the same light</li><li>4. Can control all the way double control switch</li></ol> <p>Input voltage: 90-250V AC 50/60HZ Maximum power: 150W</p>	<p>Single weight: 54g Size: 5.9*5.3*2.8cm FCL weight: 17.2kg FCL size: 36.5*28*28.5cm 300 packs</p>
44	 Zigbee SCR dimming controller (two channels)	GS-MS-105BZ	<p>Hidden dimming ZIGBEE switch 2 way</p> <ol style="list-style-type: none"><li>1. Small size, hidden in the switch box</li><li>2. The traditional switch and the smart switch operate independently, Do not interfere with each other</li><li>3. Can be used for dual control switch, Two switches control the same light</li><li>4. Can control two-way dual-control switch</li></ol> <p>Input voltage: 90-250V AC 50/60HZ Maximum power: 2*100W</p>	<p>Single weight: 54g Size: 5.9*5.3*2.8cm FCL weight: 17.2kg FCL size: 36.5*28*28.5cm 300 packs</p>



45	 <p><b>Hidden Zigbee+RF Smart Curtain Switch</b></p>	<b>GS-MS-108ZR</b>	<p>Hidden Zigbee+RF Smart Curtain Switch</p> <ol style="list-style-type: none"> <li>1. Small size, hidden in the switch box</li> <li>2. The traditional switch and the smart switch operate independently, Do not interfere with each other</li> <li>3 With RF-433 function, it can be controlled with remote control</li> </ol> <p>Input voltage: 90-250V AC 50/60HZ Maximum power: 500W</p>		<p>Single weight: 54g Size: 5.9"5.3"2.8cm FCL weight: 17.2kg FCL size: 36.5"28"28.5cm 300 packs</p>
46	 <p><b>Smart 1-gang hidden switch module</b></p>	<b>GS-zigbee-SB01-SW</b>	<p>Voltage: AC110-240V 50/60Hz Max. Load: LED 250W 10A Operation frequency: 2.412GHz-4.484GHz Operation temp.: -10 ℃~+40 ℃ Protocol: WIFI IEEE 802.11 b/g/h Operation range: less than 100m Dims(WxDxH) 39.2"39.2"18mm IP rating: IP20 Warranty: 2 years Networking: Zigbee 3.0</p> 		
47					
48	 <p><b>Smart 2-gang hidden switch module</b></p>	<b>GS-zigbee-SB02-SW</b>			
49					
50	 <p><b>Smart 3-gang hidden switch module</b></p>	<b>GS-zigbee-SB03-SW</b>			
51					
52	 <p><b>Smart 4-gang hidden switch module</b></p>	<b>GS-zigbee-SB04-SW</b>			
53					

54		 GS-zigbee-CU01- Curtain	Voltage: AC110-240V 50/60Hz Max. Load: LED 250W 3A Operation frequency: 2.412GHz-4.484GHz Operation temp.: -10 ℃~+40 ℃ Protocol: WIFI IEEE 802.11 b/g/h Operation range: less than 100m Dims(WxDxH) 39.2*39.2*18mm IP rating: IP20 Warranty: 2 years Networking: Zigbee 3.0			
55						
1- channel Smart curtain module						
56		 GS-zigbee-CU02- Curtain	Voltage: AC110-240V 50/60Hz Max. Load: LED 250W 2x3A Operation frequency: 2.412GHz-4.484GHz Operation temp.: -10 ℃~+40 ℃ Protocol: WIFI IEEE 802.11 b/g/h Operation range: less than 100m Dims(WxDxH) 39.2*39.2*18mm IP rating: IP20 Warranty: 2 years Networking: Zigbee 3.0			
57						
2- channel Smart curtain module						
Smart Switch Module (Non-neutral wire type)						
58		GS-zigbee-ZSW01-L	<b>ZigBee Smart Switch Module without Neutral wire type</b>  <b>Main features:</b> - Works with tuya smart app, smart life app - Voice control by alexa and google home assistant - Timing setting on app, can set timing control lights - With memory function  <b>Pairing way:</b> hold and press the button for 5s to enter into pairing mode  <b>Specification:</b> Voltage: AC200-240V 50/60Hz			
59		GS-zigbee-ZSW02-L	1-gang Max Load: 10-100W 2-gang Max Load: 2 x (10-100W) 3-gang Max Load: 3x (10-100W)			
60		GS-zigbee-ZSW03-L				
Smart Button Switch (86mm, EU Wall Box)						
61		WIFI-M01 1Gang	<b>ZigBee/WIFI Power Switch work with ZigBee Gateway</b> ZigBee smart light switch allows you to turn lights on and off anytime anywhere via APP/Echo/Amazon Alexa/Google Assistant/IFTTT 1)Wireless frequency: 2.4GHz (2400 - 2483.5MHz) 2)Europe style and US Style for option 3)Wireless connection: ZigBee and WIFI for option 4)Voice Control: Amazon Alexa, Google Home and IFTTT 5)Input voltage: 100-240Vac 50Hz/60Hz 6)Max. Current: 10A		  	
62		Zig-M01 1Gang				
63		Zig-M01-D 1Gang (non-neutral wire)				
64		WIFI-M02 2Gang				
65		Zig-M02 2Gang				
66		Zig-M02-D 2Gang (non-neutral wire)				
WIFI/Zigbee 2-Gang switch						
67		WIFI-M03 3Gang				
68		Zig-M03 3Gang				
69		Zig-M03-D-3Gang (non-neutral wire)				
WIFI/Zigbee 3-Gang switch						
70		Zig-Q05	Create various smart scenes linkage to any tuya smart devices you like. 4-way zigbee scene stick switch at wall 12 scene modes can be associated Battery CR2430 power supply black/gray  Long press the scene switch to turn off all your lights before sleeping. 3 modes: Single click, double click, long press			
4-way zigbee scene sticker						
Smart Button Switch (86mm, EU Wall Box, Magnetic Latching Relays)						
71		 GS-112-1 ZigBee Version	European standard, British standard, national standard for option Input voltage: 100-240VAC 50/60Hz Networking mode: ZigBee Rated power: 600W*2 Regular Color: White/Black/Gold/Grey Product size: 86*86*35 (Europe) Packing size: 106*100*51mm Product gross weight: 171g		MODEL NO: QTY: 50PCS G.W: 9.05KG MEAS: 51.5x22x26.5CM	

72	 <p><b>1-Gang Smart Switch(Neutral &amp; Live Wire)</b></p>	<p><b>GS-102-1</b> <b>WiFi version</b></p>	<p>Input voltage: 100-240VAC 50/60Hz Networking mode: WiFi Rated power: 600W Regular colors: white/black/gold/grey Product size: 86*86*35mm (Europe) Packaging size: 106*100*51mm Product gross weight: 144g</p>		
73	 	<p><b>GS-112-2</b> <b>Zigbee Version</b></p>	<p>European standard, British standard, national standard for option Input voltage: 100-240VAC 50/60Hz Networking mode: ZigBee Rated power: 600W*2 Regular Color: White/Black/Gold/Grey Product size: 86*166*35 (Europe) Packing size: 106*100*51mm Product gross weight: 178g</p>		<p>MODEL NO: QTY: 50PCS G.W: 9.05KG MEAS: 51.5x22x26.5CM</p>
74	 <p><b>2-Gang Smart Switch (Neutral &amp; Live Wire)</b></p>	<p><b>GS-102-2</b> <b>WiFi Version</b></p>	<p>Input voltage: 100-240VAC 50/60Hz Networking mode: WiFi Rated power: 600W Regular colors: white/black/gold/grey Product size: 86*86*35mm (Europe) Packaging size: 106*100*51mm Product gross weight: 144g</p>		

75		<b>GS-112-3</b> <b>Zigbee Version</b>	European standard, British standard, national standard for option Input voltage: 100-240VAC 50/60Hz Networking mode: ZigBee Rated power: 600W/2 Regular Color: White/Black/Gold/Grey Product size: 86*86*35 (Europe) Packing size: 100*100*5mm Product gross weight: 156g		MODEL NO: QTY: 50PCS G.W: 9.05KG MEAS: 51.5x22x26.5CM
76		<b>GS-102-3</b> <b>WiFi Version</b>	Input voltage: 100-240VAC 50/60Hz Networking mode: WiFi Rated power: 600W Regular colors: white/black/gold/grey Product size: 86 * 86 * 35mm (Europe) Packaging size: 100*100*5mm Product gross weight: 144g		

### QJ series Smart Button Switch (86mm, Asian Wall Box)

77		<b>ZIG-QJ-NL-01</b> <b>(Neutral &amp; Live Wire switch)</b>			
78		<b>ZIG-QJ-NL-02</b> <b>(Neutral &amp; Live Wire switch)</b>			
79		<b>ZIG-QJ-NL-03</b> <b>(Neutral &amp; Live Wire switch)</b>	Key Series ZigBee ESH Smart Switch Fine sandblasting oxidation process; The key characters are engraved with high precision laser; Customized and preferred imported Alpine brand fast switches. The hand feels smooth, the sound is soft, and the service life of the product reaches 100,000+ times Load range: 800WMAX Product size: 86*86MM Input parameters: 250V~10A, 50/60HZ Wiring method: single fire Operating temperature: -20°C~60°C Wireless Protocol: ZIGBEE MESH Energy-saving method: AES-128 Product color: Gray, White, Gold,		
80		<b>ZIG-QJ-NL-04</b> <b>(Neutral &amp; Live Wire switch)</b>			
81		<b>ZIG-QJ-NL-06</b>			
82		<b>Zigbee-QJ-NL-4-2</b>			
83		<b>GS-TYG5-SM-81Z-G</b>	<b>4-Gang switch +4 way scene switch</b>  Working voltage: 100V-240V~50Hz/60Hz Operating current: 10A Max (purely resistive load) Wiring method: zero live wire Load type: incandescent lamp 500W/channel, LED lamp 120W/channel, energy-saving lamp 200W/channel Product material: Fireproof PC shell Dimensions (height*width*thickness): 86mm*86mm*38mm Usage environment: temperature 0°C~40°C; relative humidity less than 95% Security mechanism: WPA-PSK/WPA2-PSK APP platform: TuYa Smart Smart Life Wireless standard: Zigbee 2.4GHz		100pcs: 13.50USD, Zigbee Live wire & neutral wire

HOT SALE G3 Series Smart Wall Switch					
84		<b>GS-TY93-SM-11Z-B</b>	Working voltage: 100V-240V~50Hz/60Hz Operating current: 10A Max (purely resistive load) Wiring method: zero live wire Load type: incandescent lamp 500W/channel, LED lamp 120W/channel, energy-saving lamp 200W/channel Product material: Fireproof PC shell Dimensions (height*width*thickness): 86mm*86mm*38mm Usage environment: temperature 0°C~40°C; relative humidity less than 95% Wireless standard: Wi-Fi IEEE802.11 b/gn 2.4GHz Security mechanism: WPA-PSK/WPA2-PSK APP platform: TuYa Smart Smart Life Wireless standard: Zigbee 2.4GHz		Black
85		<b>GS-TY93-SM-11Z-g</b>			Grey
86		<b>GS-TY93-SM-11Z-g</b>			Gold
87		<b>GS-TY93-SM-11Z-W</b>			White
88		<b>GS-TY93-SM-21Z-B</b>	Working voltage: 100V-240V~50Hz/60Hz Operating current: 10A Max (purely resistive load) Wiring method: zero live wire Load type: incandescent lamp 500W/channel, LED lamp 120W/channel, energy-saving lamp 200W/channel Product material: Fireproof PC shell Dimensions (height*width*thickness): 86mm*86mm*38mm Usage environment: temperature 0°C~40°C; relative humidity less than 95% Wireless standard: Wi-Fi IEEE802.11 b/gn 2.4GHz Security mechanism: WPA-PSK/WPA2-PSK APP platform: TuYa Smart Smart Life Wireless standard: Zigbee 2.4GHz		Black
89		<b>GS-TY93-SM-21Z-g</b>			Grey
90		<b>GS-TY93-SM-21Z-g</b>			Gold
91		<b>GS-TY93-SM-21Z-W</b>			White
92		<b>GS-TY93-SM-31Z-B</b>	Working voltage: 100V-240V~50Hz/60Hz Operating current: 10A Max (purely resistive load) Wiring method: zero live wire Load type: incandescent lamp 500W/channel, LED lamp 120W/channel, energy-saving lamp 200W/channel Product material: Fireproof PC shell Dimensions (height*width*thickness): 86mm*86mm*38mm Usage environment: temperature 0°C~40°C; relative humidity less than 95% Wireless standard: Wi-Fi IEEE802.11 b/gn 2.4GHz Security mechanism: WPA-PSK/WPA2-PSK APP platform: TuYa Smart Smart Life Wireless standard: Zigbee 2.4GHz		Black
93		<b>GS-TY93-SM-31Z-g</b>			Grey
94		<b>GS-TY93-SM-31Z-g</b>			Gold
95		<b>GS-TY93-SM-31Z-W</b>			White
96		<b>GS-TY93-SM-41Z-B</b>	Working voltage: 100V-240V~50Hz/60Hz Operating current: 10A Max (purely resistive load) Wiring method: zero live wire Load type: incandescent lamp 500W/channel, LED lamp 120W/channel, energy-saving lamp 200W/channel Product material: Fireproof PC shell Dimensions (height*width*thickness): 86mm*86mm*38mm Usage environment: temperature 0°C~40°C; relative humidity less than 95% Wireless standard: Wi-Fi IEEE802.11 b/gn 2.4GHz Security mechanism: WPA-PSK/WPA2-PSK APP platform: TuYa Smart Smart Life Wireless standard: Zigbee 2.4GHz		Black
97		<b>GS-TY93-SM-41Z-g</b>			Grey
98		<b>GS-TY93-SM-41Z-g</b>			Gold
99		<b>GS-TY93-SM-41Z-W</b>			White
100		<b>GS-TY93-SM-61Z-B</b>	Working voltage: 100V-240V~50Hz/60Hz Operating current: 10A Max (purely resistive load)		Black

101		<b>GS-TY03-SM-61Z-g</b>	Wiring method: zero live wire Load type: incandescent lamp 500W/channel, LED lamp 120W/channel, energy-saving lamp 200W/channel Product material: Fireproof PC shell Dimensions (height*width*thickness):86mm*86mm*38mm Usage environment: temperature 0℃~40℃, relative humidity less than 95% Wireless standard: Wi-Fi IEEE802.11 b/g/n 2.4GHz Security mechanism: WPA-PSK/WPA2-PSK APP platform: Tuya Smart/Smart Life Wireless standard: Zigbee 2.4GHz		Grey
102		<b>GS-TY03-SM-61Z-g</b>			Gold
103		<b>GS-TY03-SM-61Z-W</b>			White

## B2 Series Smart Button Wall Switch (86 type, EU Wall Box, L&N Wires)



White color



Black color



Grey color




Gold color

104		GS-TYB2-SM-11Z-W			Black
105		GS-TYB2-SM-11Z-g			Grey
106		GS-TYB2-SM-11Z-G			Gold
107		GS-TYB2-SM-11Z-B			White
108		GS-TYB2-SM-21Z-W			Black
109		GS-TYB2-SM-21Z-g			Grey
110		GS-TYB2-SM-21Z-G			Gold
111		GS-TYB2-SM-21Z-B			White
112		GS-TYB2-SM-31Z-W	<p>Working voltage: 100V-240V~, 50Hz/60Hz  Working current: 10A Max (pure resistive load)  Wiring method: neutral and live wire  Load type: incandescent lamp 500W/channel, LED lamp 120W/channel, energy-saving lamp 200W/channel  Product material: fireproof PC shell  Dimensions (height*width*thickness): 86mm*86mm*40mm  Use environment: temperature 0℃~40℃, relative humidity less than 95%  Wireless standard: Wi-Fi IEEE802.11 b/g/n 2.4GHz  Security mechanism: WPA-PSK/WPA2-PSK  APP platform: Tuya Smart Smart Life  Wireless standard: Zigbee 2.4GHz</p>		Black
113		GS-TYB2-SM-31Z-g			Grey
114		GS-TYB2-SM-31Z-G			Gold
115		GS-TYB2-SM-31Z-B			White
116		GS-TYB2-SM-1CTZ-W			Black
117		GS-TYB2-SM-1CTZ-g			Grey
118		GS-TYB2-SM-1CTZ-G			Gold
119		GS-TYB2-SM-1CTZ-B			White



















## B2 Series Smart Button Wall Switch (86 type, EU Wall Box, Non-neutral Wire type)

121		GS-TYB2-SFM-11Z-W			Black
122		GS-TYB2-SFM-11Z-g			Grey
123		GS-TYB2-SFM-11Z-G			Gold
124		GS-TYB2-SFM-11Z-B			White
125		GS-TYB2-SFM-21Z-W	<p>Working voltage: 100V-240V~, 50Hz/60Hz  Working current: 10A Max (pure resistive load)  Wiring method: Live wire or Live wire and Neutral wire  Load type: incandescent lamp 500W/channel, LED lamp 120W/channel, energy-saving lamp 200W/channel  Product material: fireproof PC shell  Dimensions (height*width*thickness): 86mm*86mm*40mm  Use environment: temperature 0℃~40℃, relative humidity less than 95%  Wireless standard: Wi-Fi IEEE802.11 b/g/n 2.4GHz  Security mechanism: WPA-PSK/WPA2-PSK  APP platform: Tuya Smart Smart Life  Wireless standard: Zigbee 2.4GHz</p>		Black
126		GS-TYB2-SFM-21Z-g			Grey
127		GS-TYB2-SFM-21Z-G			Gold
128		GS-TYB2-SFM-21Z-B			White



129	 <b>Smart ZigBee Wall Switch -3 gang (L wire)</b>	<b>GS-TYB2-SFM-31Z-W</b>			Black
130		<b>GS-TYB2-SFM-31Z-G</b>			Grey
131		<b>GS-TYB2-SFM-31Z-G</b>			Gold
132		<b>GS-TYB2-SFM-31Z-B</b>			White

Smart Switch with metal frame (86mm, European standard base)				
133	 <div>1-Gang Zigbee Wall Switch (Silver frame optional)</div>	Aluminum alloy frame + flat glass panel (L&N wire) GS-Z3NL-EU-01F		
134		Aluminum alloy frame + concave panel (L&N wire) GS-Z3NL-EU-01C		
135	 <div>2-Gang Zigbee Wall Switch (Silver frame optional)</div>	Aluminum alloy frame + flat glass panel (L&N wire) GS-Z3NL-EU-02F	Input voltage: 100-240VAC (50/60Hz) Networking mode: Zigbee Max Power: 2000W Max Current: 10A Product Size: 86 * 86 * 35mm Service Life: 100000 times Housing Color: white/black/gold Operating Temperature: -20℃ ~ +50℃ Plastic Material: ABS+Single crystal tempered glass Fire protection rating: 94-V0 Packing detail: 100pcs/carton Carton Size: 47*39*21cm 100pcs for 1/2/3/4gang /carton weight is 17/18/19/20kg	
136		Aluminum alloy frame + concave panel (L&N wire) GS-Z3NL-EU-02C		
137	 <div>3-Gang Zigbee Wall Switch (Silver frame optional)</div>	Aluminum alloy frame + flat glass panel (L&N wire) GS-Z3NL-EU-03F	Feature : 1. Remote control by mobile APP 2. Support Amazon Alexa, Google Assistant, IFTTT and other intelligent voice control 3. Timing switches/Share control 4. WIFI touch switch (Bluetooth + WIFI dual mode, can be quickly configured by Bluetooth of the player, or can be quickly configured in conventional mode)	
138		Aluminum alloy frame + concave panel (L&N wire) GS-Z3NL-EU-03C		
139	 <div>4-Gang Zigbee Wall Switch (Silver frame optional)</div>	Aluminum alloy frame + flat glass panel (L&N wire) GS-Z3NL-EU-04F		
140		Aluminum alloy frame + concave panel (L&N wire) GS-Z3NL-EU-04C		
Smart ZigBee & WiFi Touch Switch				
141	 <div>1- Gang touch wall switch with Neutral wire</div>	GS-111-1 Zigbee version	European standard, British standard, ZIGBEE touch switch 1) Input voltage: 100-240VAC 50/60Hz 2) Connection mode: Zigbee 3) rated power: 600W Regular 4) Color: White/Black/Gold/Gray 5) Product Size: 86 * 86 * 35mm (Europe) 6) Package Size: 128*120*61mm gross weight: 250g	MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM
142		GS-101BW-1 WiFi version	European standard, British standard, universal WIFI touch switch (WIFI+ Bluetooth) dual mode Neutral fire version, (EU standard/UK standard) 1) Input voltage: 100-240VAC 50/60Hz 2) Connection mode: WIFI 3) rated power: 600W Regular 4) Color: White/Black/Gold/Gray 5) Product Size: 86 * 86 * 35mm (Europe) 6) Package Size: 128*120*61mm gross weight: 250g	MODEL NO: QTY: 50PCS G.W: 13.4KGS MEAS: 55x25x28CM
143	 <div>2- Gang touch wall switch with Neutral wire</div>	GS-111-2 Zigbee version	European standard, British standard, ZIGBEE touch switch 1) Input voltage: 100-240VAC 50/60Hz 2) Connection mode: Zigbee 3) rated power: 600W *2 Regular 4) Color: White/Black/Gold/Gray 5) Product Size: 86 * 86 * 35mm (Europe) 6) Package Size: 128*120*61mm gross weight: 250g	MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM
144		GS-101BW-2 WiFi version	European standard, British standard, universal WIFI touch switch (WIFI+ Bluetooth) dual mode Neutral fire version, (EU standard/UK standard) 1) Input voltage: 100-240VAC 50/60Hz 2) Connection mode: WIFI 3) rated power: 600W*2 Regular 4) Color: White/Black/Gold/Gray 5) Product Size: 86 * 86 * 35mm (Europe) 6) Package Size: 128*120*61mm gross weight: 250g	
145	 <div>3- Gang touch wall switch with Neutral wire</div>	GS-111-3 Zigbee version	European standard, British standard, ZIGBEE touch switch 1) Input voltage: 100-240VAC 50/60Hz 2) Connection mode: Zigbee 3) rated power: 600W *3 Regular 4) Color: White/Black/Gold/Gray 5) Product Size: 86 * 86 * 35mm (Europe) 6) Package Size: 128*120*61mm gross weight: 250g	MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM
146		GS-101BW-3 WiFi version	European standard, British standard, universal WIFI touch switch (WIFI+ Bluetooth) dual mode Neutral fire version, (EU standard/UK standard) 1) Input voltage: 100-240VAC 50/60Hz 2) Connection mode: WIFI 3) rated power: 600W*3 Regular 4) Color: White/Black/Gold/Gray 5) Product Size: 86 * 86 * 35mm (Europe) 6) Package Size: 128*120*61mm gross weight: 250g	

147	 	<b>GS-111-4</b> <b>ZigBee version</b>	European standard, British standard, ZIGBEE touch switch 1) Input voltage: 100-240VAC 50/60Hz 2) Connection mode: ZigBee 3) rated power: 600W *4 Regular 4) Color: White/Black/Gold/Gray 5) Product Size: 86 * 86 * 35mm (Europe) 6) Package Size: 126*120*61mm gross weight: 250g		MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM
148	<b>4- Gang touch wall switch with Neutral wire</b>	<b>GS-101JL-1</b> <b>WIFI version</b>	(Single fire and zero fire universal relay) To connect the single fire line needs to connect a capacitor at the first light port of L1 1) Input voltage: 100-240VAC 50/60Hz 2) Connection mode: WIFI 3) rated power: 5-400W 4) Color: White/Black/Gold/Gray 5) Product Size: 86 * 86 * 35mm (Europe) 6) Package Size: 126*120*61mm gross weight: 250g		MODEL NO: QTY: 50PCS G.W: 13.4KGS MEAS: 55x25x28CM
149	  (magnetic latching relay) 1- Gang touch switch (Non-neutral wire and live & neutral wire are universal, no need to connect capacitors)	<b>GS-1011ZC-1</b>	(Magnetic latching relay) 1- Gang touch switch with Neutral wire and without Neutral wire universal 1) Input voltage: 100-240VAC 50/60Hz 2) Networking mode: ZigBee 3) Rated power: 3-600W Regular 4) Color: White/Black/Gold/Gray 5) Product Size: 86*86*35 (Europe) 6) Package Size: 106*100*51mm 7) Gross weight: 250g		MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM
150	  (magnetic latching relay) 2- Gang touch switch (Non-neutral wire and live & neutral wire are universal, no need to connect capacitors)	<b>GS-1011ZC-2</b>	(Magnetic latching relay) 2- Gang touch switch with Neutral wire and without Neutral wire universal 1) Input voltage: 100-240VAC 50/60Hz 2) Networking mode: ZigBee 3) Rated power: 3-600W *2 Regular 4) Color: White/Black/Gold/Gray 5) Product Size: 86*86*35 (Europe) 6) Package Size: 106*100*51mm 7) Gross weight: 250g		MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM
151	  (magnetic latching relay) 3- Gang touch switch (Non-neutral wire and live & neutral wire are universal, no need to connect capacitors)	<b>GS-1011ZC-3</b>	(Magnetic latching relay) 3- Gang touch switch with Neutral wire and without Neutral wire universal 1) Input voltage: 100-240VAC 50/60Hz 2) Networking mode: ZigBee 3) Rated power: 3-600W *3 Regular 4) Color: White/Black/Gold/Gray 5) Product Size: 86*86*35 (Europe) 6) Package Size: 106*100*51mm 7) Gross weight: 250g		MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM
152	 	<b>GS-161Z</b>	ZigBee Touch Switch High Power Water Heater (20A) suitable for EU.UK.CN standard 1)Input voltage: 100-240VAC 50/60Hz 2)Connection mode: ZigBee 3)Rated power: 4000W 4)Regular Color: White/Black/Gold/Gray 5)Product Size: 86 * 86 * 35mm (Europe) 6)Package Size: 126*120*61mm 7) gross weight: 258g		MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM
153	  ZigBee High Power Water Heater Touch Switch (20A)	<b>DS161</b>	WIFI Touch Switch High Power Water Heater (20A) suitable for EU.UK.CN standard 1)Input voltage: 100-240VAC 50/60Hz 2)Connection mode: WIFI 3)Rated power: 4000W 4)Regular Color: White/Black/Gold/Gray 5)Product Size: 86 * 86 * 35mm (Europe) 6)Package Size: 126*120*61mm 7) gross weight: 258g		MODEL NO: QTY: 50PCS G.W: 13.4KGS MEAS: 55x25x28CM
154	 	<b>GS-101DZN</b> (ZigBee)	ZigBee Touch Switch High Power Water Heater (40A) suitable for EU.UK.CN standard 1)Input voltage: 100-240VAC 50/60Hz 2)Connection mode: ZigBee 3)Rated power: 8000W 4)Regular Color: White/Black/Gold/Gray 5)Product Size: 86 * 86 * 35mm (Europe) 6)Package Size: 126*120*61mm 7) gross weight: 258g		MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM
155	  ZigBee High Power Water Heater Touch Switch (40A)	<b>GS-101DWN</b> (WIFI)	WIFI Touch Switch High Power Water Heater (40A) 1)Input voltage: 100-240VAC 50/60Hz 2)Connection mode: WIFI 3)Rated power: 8000W 4)Regular Color: White/Black/Gold/Gray 5)Product Size: 86 * 86 * 35mm (Europe) 6)Package Size: 126*120*61mm 7) gross weight: 258g		MODEL NO: QTY: 50PCS G.W: 13.4KGS MEAS: 55x25x28CM
156	 	<b>GS151</b> (WIFI)	WIFI curtain touch switch (control electric curtain, curtain, shutter gate) 1)Input voltage: 100-240VAC 50/60Hz 2)Connection mode: WIFI rated power: 1800W Regular 3)Color: White/Black/Gold/Gray 4)Product Size: 86 * 86 * 35mm (Europe) 5)Package Size: 106*100*51mm 6)gross weight: 250g		MODEL NO: QTY: 50PCS G.W: 13.4KGS MEAS: 55x25x28CM
157	  Smart curtain touch switch (control electric curtain, curtain, shutter gate)	<b>GS-151Z</b> (ZigBee)	ZigBee curtain touch switch (control electric curtain, curtain, shutter gate) 1)Input voltage: 100-240VAC 50/60Hz 2)Connection mode: ZigBee Rated power: 1800W Regular 3)Color: White/Black/Gold/Gray 4)Product Size: 86 * 86 * 35mm (Europe) 5)Package Size: 106*100*51mm 6)gross weight: 250g		MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM
158	 	<b>WIFI-102-D</b>	Power supply: AC100V-240V±10% 50Hz Working temperature: 0℃-80℃ Switch load power: 3-400W Standby power consumption: ≤0.5W Relative humidity: 10% to 93% (non-condensing)		 

159	<p>Smart Dimmer Switch (US/EU standard)</p>	<b>ZIGBEE-102-DZ</b>	<p>Control: Touch app, brightness memory function            Connection: N (Neutral), L (Line), L1 Control (open), L2 Control (Off), GND (No need to connect if there isn't GND in case.)            Product Specifications: 120*74*39mm, (4.7*2.9*1.5)in            Wi-Fi standard: 802.11b/g/n, 2.4GHz            Wi-Fi save mode: WEP, WPA/WPA2, Switch Dimension: 4.7 x 2.9 x 1.5 in</p>	
160	<p>WIFI &amp; RF fan switch (EU version)</p>	<b>WS-EU-FL</b>	<p><b>WIFI &amp; RF tuya smart fan speed control and light smart switch 2 in 1.</b></p> <ul style="list-style-type: none"> <li>• Works with tuya smart/smart life app, alexa voice control</li> <li>• WiFi network: 2.4G b/g/n, 433Mhz</li> <li>• Max Load: 10A (light)/5.7A (fan)</li> <li>• Operate voltage: 100-250VAC</li> <li>• Touch button function: turn on/off fan, high/low speed, and light on/off</li> <li>• Timing on/off setting</li> <li>• Supports multi-people(mobile app) control or single people control the switch</li> <li>• Support multi control association function</li> </ul> <p>Dimension:    Product weight: 0.25kg</p>	







## Smart Touch Button Switch

161		 <b>GS-86-EU-Zigb-WF-01</b> (L&N Wires)			
162		 <b>GS-86-EU-Zigb-WF-01L</b> (No neutral wire)			
163		 <b>GS-VR-WIFI-01</b> (L&N Wires)			
164		 <b>GS-VR-WIFI-01L</b> (No neutral wire)			
165		 <b>GS-86-EU-Zigb-WF-01</b> (L&N Wires)			
166		 <b>GS-86-EU-Zigb-WF-01L</b> (No neutral wire)			
167		 <b>GS-VR-WIFI-01</b> (L&N Wires)			
168		 <b>GS-VR-WIFI-01L</b> (No neutral wire)			
169		 <b>GS-86-EU-Zigb-WF-01</b> (L&N Wires)			
170		 <b>GS-86-EU-Zigb-WF-01L</b> (No neutral wire)			
171		 <b>GS-VR-WIFI-01</b> (L&N Wires)			
172		 <b>GS-VR-WIFI-01L</b> (No neutral wire)			
173		 <b>GS-86-EU-Zigb-WF-01</b> (L&N Wires)			
174		 <b>GS-86-EU-Zigb-WF-01L</b> (L&N Wires)			
175		 <b>GS-VR-WIFI-01</b> (No-neutral wire)			
176		 <b>GS-VR-WIFI-01L</b> (No-neutral wire)			
177		 <b>GS-86-EU-Zigbee--CU-01</b>			
178		 <b>GS-86-EU-CU-01</b>			

86 European standard/British standard smart switch (Live wire and Neutral Wire Type)


1. Input voltage: 100-240VAC 50/60Hz
2. Network: wifi 2.4G/ZigBee 3.0
3. Product items: 1, 2, 3, 4Gang smart switch
4. Switch rated power: 1000W/Gang Maximum current: 10A
5. Standby power: 0.5W
6. Size: 86\*86\*34mm
7. Color: white/black/gold/grey (customizable color, customized panel LOGO).
8. Panel material: tempered glass; shell material: ABS+PC, fire resistance: 94-V0
9. Packing size: 86\*86\*34mm Gross weight: 180g
10. Carton size: 44\*21\*27mm Weight: 10KG
11. Quantity: 50 pieces
12. Using Tuya certified CBS3 module, it can directly pass FCC and ANATEL certification
13. Supports dual control. After setting through the APP, two smart switches can control the same light at the same time. The power-off memory function can turn off the indicator light.
14. If you need to add anti-fingerprint AG glass panel, you need to add USD1.20/unit.




179	 <p>86-EU Digital Dimming Smart Switch</p>	 GS-86-EU-Zigbee--DIM-01	<div> <div></div> <div> Input voltage: 100-240VAC 50/60Hz  Connectivity mode: WiFi/Zigbee for option  Rated power: 150W  Regular colour: white/black/gold/grey  Product size: 86 * 86 * 35mm (Europe)  Package size: 90*90*50mm  Gross product weight: 218g </div> </div>		
180		 GS-86-EU-DIM-01			
181	 <p>86-EU Digital FAN Smart Switch</p>	 GS-86-EU-Zigbee-FAN-01	<div> <div></div> <div> 86-EU Digital Intelligent Fan Switch  1. Wall switch; 86*86*35mm  2.White&amp;Black&amp;Grey&amp;Gold for option  3. AC 100V-240V 60HZ/50HZ  4.600W/Way  5.App: tuya smart/smart life </div> </div>		
182		 GS-86-EU-FAN-01			

No.	Product Image	Model No.	Description of the Goods	Price	Packing info.	
Smart Wall Switch US standard wall box						
144		Aluminum alloy frame + flat glass panel (L&N wire) GS-Z3NL-EU-01F	Input voltage: 100-240VAC (50/60Hz) Networking mode: Zigbee Max Power: 2000W Max Current: 10A Product Size: 86 * 86 * 35mm Service Life: 100000 times Housing Color: white/black/gold Operating Temperature: -20℃ ~ +50℃ Plastic Material: ABS+Single crystal tempered glass panel Fire protection rating: 94-V0 Packing detail: 100pcs/carton Carton Size: 47*39*21cm 100pcs for 1/2/3/4gang /carton weight is 17/18/19/20kg  Feature : 1. Remote control by mobile APP 2. Support Amazon Alexa, Google Assistant, IFTTT and other intelligent voice control 3. Timing switches/Share control 4. WIFI touch switch (Bluetooth + WIFI dual mode, can be quickly configured by Bluetooth of the player, or can be configured by WIFI in conventional mode)			
145		Aluminum alloy frame + concave panel (L&N wire) GS-Z3NL-EU-01C				
146		Aluminum alloy frame + flat glass panel (L&N wire) GS-Z3NL-EU-02F			  	
147		Aluminum alloy frame + concave panel (L&N wire) GS-Z3NL-EU-02C				
148		Aluminum alloy frame + flat glass panel (L&N wire) GS-Z3NL-EU-03F				
149		Aluminum alloy frame + concave panel (L&N wire) GS-Z3NL-EU-03C				
150		Aluminum alloy frame + flat glass panel (L&N wire) GS-Z3NL-EU-04F				
151		Aluminum alloy frame + concave panel (L&N wire) GS-Z3NL-EU-04C				
	US type Smart Switch with Metal Frame					
152	  Gold & White Bold & Black for option	GS-AF-US-Zigbee-01 (L&N wires)	120-American standard Australian standard aluminum alloy frame Zigbee smart switch (Live & Neutral Wire Type) 1. Input voltage: 100-240VAC 50/60Hz 2. Network: Zigbee (requires gateway) 3. Product items: 1,2,3,4gang smart switch 4. Switch rated power: 1000W/Gang Maximum current: 10A 5. Size: 120*72*34mm 6. Color: black/gold 7. Panel material: 2.5D luxury tempered glass 8. Shell material: aluminum alloy frame+ABS+PC, fire protection grade: 94-V0 9. Packing size: 130*80*40mm Gross weight: 200g 10. Carton size: 44*21*27mm Weight: 9.5KG, Quantity: 50 pieces 11. Using Tuya certified modules, it can directly pass FCC and ANATEL certification. 12. Support dual control. After setting through APP, two smart switches can control the same light at the same time.			
153		GS-AF-US-WiFi-01 (L&N wires)				
154	  Gold & White Bold & Black for option	GS-AF-US-Zigbee-02 (L&N wires)				
155		GS-AF-US-WiFi-02 (L&N wires)				
156	  Gold & White Bold & Black for option	GS-AF-US-Zigbee-03 (L&N wires)				
157		GS-AF-US-WiFi-03 (L&N wires)				



158	 <p>Gold &amp; White Bold &amp; Black for option</p>	GS-AF-US-Zigbee-04 (L&N wires)		
159		GS-AF-US-WiFi-04 (L&N wires)		
US/AU Type Smart Wall Switch 1- Gang (Zigbee/WiFi)				














160	  <b>Gold &amp; White</b> <b>Bold &amp; Black for option</b>	GS-AF-US-Zigbee-01L <b>(Non-neutral wire)</b>	120-American standard Australian standard aluminum alloy frame Zigbee smart switch (Live Wire Type) 1. Input voltage: 100-240VAC 50/60Hz 2. Network: Zigbee (requires gateway) 3. Product items: 1,2,3,4gang smart switch 4. Switch rated power: 400W/Gang Maximum current: 10A 5. Size: 120*72*34mm 6.Color: black/gold 7. Panel material: 2.5D luxury tempered glass 8. Shell material: aluminum alloy frame+ABS+PC, fire protection grade: 94-V0 9. Packing size: 130*80*40mm Gross weight: 200g 10. Carton size: 44*21*27mm Weight: 9.5KG, Quantity: 50 pieces 11. Using Tuuya certified modules, it can directly pass FCC and ANATEL certification 12. Support dual control. After setting through APP, two smart switches can control the same light at the same time.		
161		GS-AF-US-WiFi-01L <b>(Non-neutral wire)</b>			
162	  <b>Gold &amp; White</b> <b>Bold &amp; Black for option</b>	GS-AF-US-Zigbee-02L <b>(Non-neutral wire)</b>			
163		GS-AF-US-WiFi-02L <b>(Non-neutral wire)</b>			
164	  <b>Gold &amp; White</b> <b>Bold &amp; Black for option</b>	GS-AF-US-Zigbee-03L <b>(Non-neutral wire)</b>			
165		GS-AF-US-WiFi-03L <b>(Non-neutral wire)</b>			
166	  <b>Gold &amp; White</b> <b>Bold &amp; Black for option</b>	GS-AF-US-Zigbee-04L <b>(Non-neutral wire)</b>			
167		GS-AF-US-WiFi-04L <b>(Non-neutral wire)</b>			
168	  120Type US Digital Smart Curtain Touch Switch (neutral wire+fire wire) Aluminium frame	GS-US-Zigbee-CUR01-AF	American standard Zigbee aluminum alloy frame digital curtain smart switch 1. Wall switch; 120*72mm 2.White&Black&Grey&Gold 3.AC 100V-240V 60hz/50hz 4.3-600W/Gang 600W/total 5. Relay switching is more stable 6. Wiring method: Live & Neutral wire (neutral wire required)		
169		GS-US-WiFi-CUR01-AF	<b>Colors for option:</b> Gold and White Gold and black Silver White silver black		
170	  120Type US Digital Smart Dimming Touch Switch (neutral wire+fire wire) Aluminium frame	GS-US-Zigbee-Dimming-AF	American standard Zigbee aluminum alloy frame digital dimming smart switch 1. Wall switch; 120*72mm 2.White&Black&Grey&Gold 3.AC 100V-240V 60hz/50hz 4.3-600W/Gang.600W/total 5. Relay switching is more stable 6. Wiring method: Live & Neutral wire (neutral wire required)		
171		GS-US-WiFi-Dimming-AF	<b>Colors for option:</b> Gold and White Gold and black Silver White silver black		
172	  120Type US Digital Smart Fan Touch switch (neutral wire+fire wire) Aluminium frame	GS-Zigbee-FAN-US - AF	American standard Zigbee aluminum alloy frame digital fan light smart switch 1. Wall switch; 120*72mm 2.White&Black&Grey&Gold 3.AC 100V-240V 60hz/50hz 4.3-600W/Gang.600W/total 5. Relay switching is more stable 6. Wiring method: Live & Neutral wire (neutral wire required)		
173		GS-WiFi-FAN-US-AF			

174	  40A high-power switch of 120 American standard water heater + Aluminium frame	GS-US-Zigbee-40A-AF	American standard Zigbee aluminum alloy frame water heater smart switch 1. Wall switch; 120*72mm 2. White&Black&Grey&Gold 3.AC 100V-240V 60hz/50hz 4.8800W/total 5. Relay switching is more stable 6. Wiring method: Live & Neutral wire (neutral wire required)		
175		GS-US-WiFi-40A-AF			




176		GS-US-Zigbee-20A AF	American standard Zigbee aluminum alloy frame water heater smart switch 1. Wall switch; 120*72mm 2. White&Black&Grey&Gold 3.AC 100V-240V 60hz/50hz 4.4400W/total 5. Relay switching is more stable 6. Wiring method: Live & Neutral wire (neutral wire required)		
177	20A high-power switch of 120 American standard water heater + Aluminium frame	GS-US-WIFI-20A-AF			
HOT! SALE					
147Type 4/5/6/8/10/Gang Smart Switch					
178		147-Zigbee-04	147 large board Zigbee smart switch 1. Input voltage: 100-240VAC 50/60Hz 2.Network: wifi 2.4G 3. Product items: 6, 8, 10 Gang smart switches 4. Switch rated power: 1000W/Gang Maximum current: 10A 5. Standby power: 0.5W 6. Size: 147*86*36mm 7. Lifespan: 100,000 times 8. Color: white/black (customizable color, customized panel LOGO). 9. Operating temperature: -20℃~+50℃. 10. Panel material: tempered glass 11. Shell material: ABS+PC 12. Fire performance: 94-V0 13. Packing size: 16*9*40mm Gross weight: 350g 14. Using Tuya certified CBS3 module, it can directly pass FCC and ANATEL certification 15. Supports dual control. After setting through the APP, two smart switches can control the same light at the same time. The power-off memory function can turn off the indicator light.		
179	Type146-4gang WiFi tuya Smart Switch (With neutral line)	147-WiFi-04			
180		147-Zigbee-05			
181	Type146-5 gang tuya Smart Switch (With neutral line)	147-WiFi-05			
182		147-Zigbee-06			
183	Type146-6 gang tuya Smart Switch (With neutral line)	147-WiFi-06			
184		147-Zigbee-08			
185	Type146-8-gang WiFi tuya Smart Switch (With neutral line)	147-WiFi-08			
186		147-Zigbee-10			
187	Type146-8 gang WiFi tuya Smart Switch (With neutral line)	147-WiFi-10			
			Zigbee Touch Wall Switch- US Standard		
188	  (Magnetic Latching Relay) 1-gang ZigBee touch switch (ZigBee single fire and zero fire universal, no need to connect capacitors)	GS-1211ZC-1	US standard, Australian standard, Italy, Canada, Brazil, Vietnam, Thailand Input voltage: 100-240VAC 50/60Hz Networking mode: ZigBee Rated power: 3-600W Regular Color: White/Black/Gold/Grey Product size: 118 * 72 * 35mm (USA) Package size: 138*89*55mm Product gross weight: 255g		

189	 <p>(Magnetic Latching Relay) 2-gang ZigBee touch switch (ZigBee single fire and zero fire universal, no need to connect capacitors)</p>	GS-1211ZC-2	<p>US standard, Australian standard, Italy, Canada, Brazil, Vietnam, Thailand Input voltage: 100-240VAC 50/60Hz Networking mode: ZigBee Rated power: 3-600W Regular Color: White/Black/Gold/Grey Product size: 118*72*35mm (USA) Package size: 138*88*55mm Product gross weight: 255g</p>		<p>MODEL NO: QTY: 50PCS G.W: 13.2KG MEAS: 47x29.2x30.5CM</p>
-----	---	-------------	---	--	--











190	 <p>(Magnetic Latching Relay) 3-gang ZigBee touch switch (ZigBee single fire and zero fire universal, no need to connect capacitors)</p>	GS-12112C-3	 <p>US standard, Australian standard, Italy, Canada, Brazil, Vietnam, Thailand Input voltage: 100-240VAC 50/60Hz Networking mode: ZigBee Rated power: 3-600W Regular Color: White/Black/Gold/Grey Product size: 118 * 72 * 35mm (USA) Package size: 138*89*55mm Product gross weight: 255g</p>		
191	 <p>1- Gang Smart touch switch with Neutral wire</p>	GS-124-1	 <p>Input voltage: 100-240VAC 50/60Hz Networking mode: ZigBee Rated power: 600W Regular Color: White/Black/Gold/Grey Product size: 118 * 72 * 35mm (USA) Package size: 138*89*55mm Product gross weight: 255g</p>		
192		 <p>GS-121BW-1</p>	<p><u>WiFi touch switch (WiFi+ Bluetooth dual mode) with Neutral wire</u> <u>Suitable for USA, Australia, Italy, Canada, Brazil, Vietnam, Thailand</u></p> <p>1) Input voltage: 100-240VAC 50/60Hz 2) Connection mode: WiFi 3) Rated power: 600W 4) Regular Color: White/Black/Gold/Grey 5) Product Size: 118 * 72 * 35mm (US) 6) Package Size: 158*99*65mm 7) Gross weight: 280g</p>		
193	 <p>2- Gang Smart touch switch with Neutral wire</p>	GS-124-2	 <p>Input voltage: 100-240VAC 50/60Hz Networking mode: ZigBee Rated power: 600W Regular Color: White/Black/Gold/Grey Product size: 118 * 72 * 35mm (USA) Package size: 138*89*55mm Product gross weight: 255g</p>		
194		 <p>GS-121BW-2</p>	<p><u>WiFi touch switch (WiFi+ Bluetooth dual mode) with Neutral wire</u> <u>Suitable for USA, Australia, Italy, Canada, Brazil, Vietnam, Thailand</u></p> <p>1) Input voltage: 100-240VAC 50/60Hz 2) Connection mode: WiFi 3) Rated power: 600W *2 4) Regular Color: White/Black/Gold/Grey 5) Product Size: 118 * 72 * 35mm (US) 6) Package Size: 158*99*65mm 7) Gross weight: 280g</p>		
195	 <p>3- Gang Smart touch switch with Neutral wire</p>	GS-124-3	 <p>Input voltage: 100-240VAC 50/60Hz Networking mode: ZigBee Rated power: 600W Regular Color: White/Black/Gold/Grey Product size: 118 * 72 * 35mm (USA) Package size: 138*89*55mm Product gross weight: 255g</p>		
196		 <p>GS-121BW-3</p>	<p><u>WiFi touch switch (WiFi+ Bluetooth dual mode) with Neutral wire</u> <u>Suitable for USA, Australia, Italy, Canada, Brazil, Vietnam, Thailand</u></p> <p>1) Input voltage: 100-240VAC 50/60Hz 2) Connection mode: WiFi 3) Rated power: 600W *3 4) Regular Color: White/Black/Gold/Grey 5) Product Size: 118 * 72 * 35mm (US) 6) Package Size: 158*99*65mm 7) Gross weight: 280g</p>		
197	 <p>4- Gang Smart touch switch with Neutral wire</p>	GS-124-4	 <p>Input voltage: 100-240VAC 50/60Hz Networking mode: ZigBee Rated power: 600W Regular Color: White/Black/Gold/Grey Product size: 118 * 72 * 35mm (USA) Package size: 138*89*55mm Product gross weight: 255g</p>		
198		 <p>GS-121BW-4</p>	<p><u>WiFi touch switch (WiFi+ Bluetooth dual mode) with Neutral wire</u> <u>Suitable for USA, Australia, Italy, Canada, Brazil, Vietnam, Thailand</u></p> <p>1) Input voltage: 100-240VAC 50/60Hz 2) Connection mode: WiFi 3) Rated power: 600W *4 4) Regular Color: White/Black/Gold/Grey 5) Product Size: 118 * 72 * 35mm (US) 6) Package Size: 158*99*65mm 7) Gross weight: 280g</p>		
199	 <p>SmartTouch Switch High Power Water Heater (20A)</p>	GS-162Z	 <p>Input voltage: 100-240VAC 50/60Hz Networking mode: ZigBee Rated power: 4000W Regular Color: White/Black/Gold/Grey Product size: 118 * 72 * 35mm (USA) Package size: 138*89*55mm Product gross weight: 255g</p>		
200		 <p>GS-162</p>	<p>Input voltage: 100-240VAC 50/60Hz Networking mode: WiFi Rated power: 4000W Regular Color: White/Black/Gold/Grey Product size: 118 * 72 * 35mm (USA) Package size: 138*89*55mm Product gross weight: 255g</p>		






201		 GS-121DZN	Input voltage: 100-240VAC 50/60Hz Networking mode: ZigBee Rated power: 8000W Regular Color: White/Black/Gold/Grey Product size: 118 * 72 * 35mm (USA) Package size: 138*89*55mm Product gross weight: 255g		
202	Smart Touch Switch High Power Water Heater (40A)	 GS-121DWN	<b>Wi-Fi Touch Switch High Power Water Heater (20A)</b> <u>Suitable for USA, Australia, Italy, Canada, Brazil, Vietnam, Thailand</u> 1) Input voltage: 100-240VAC 50/60Hz 2) Connection mode: Wi-Fi 3) Rated power: 8000W 4) Regular Color: White/Black/Gold/Gray 5) Product Size: 118 * 72 * 35mm (US) 6) Package Size: 158*99*65mm 7) Gross weight: 280g		
203	 Wi-Fi curtain touch switch (Control electric curtains, roller shutters, roller shutters, etc.)	GS-152	<b>US regulations, Australian regulations, Italy, Canada, Brazil, Vietnam, Thailand</b> Input voltage: 100-240VAC 50/60Hz Networking mode: Wi-Fi Rated power: 1800W Regular Color: White/Black/Gold/Grey Product size: 118 * 72 * 35mm (USA) Package size: 138*89*55mm Product gross weight: 255g		
204	 Wi-Fi dimming touch switch	GS-172	<b>US regulations, Australian regulations, Italy, Canada, Brazil, Vietnam, Thailand</b> Input voltage: 100-240VAC 50/60Hz Networking mode: Wi-Fi Rated power: 600W Regular Color: White/Black/Gold/Grey Product size: 118 * 72 * 35mm (USA) Package size: 138*89*55mm Product gross weight: 255g		
205	 WIFI & RF fan switch (US version)	WRS-USF-WH-MS (WHITE COLOR) WRS-USF-BK-MS (White color)	<b>Wi-Fi tuya smart fan wall switch (Neutral and Live wire)</b> - Works with tuya smartest life app, alexa voice control - Wi-Fi network: 2.4G b/g/n - Max. Load: 10A (light)/0.7A (fan) - Rated power: 150W, 60Hz - Operate voltage: 100-250VAC - Touch button function: turn on/off fan, high/low speed - Timing on/off setting - Supports multi-people(mobile app) control or single people control the switch - Support multi- control association function Dimension: 72*118*50.6mm Product weight: 0.25kg		
206		GS-DS-101BZN Wi-Fi	* Power: AC110-220V 20A * Power consumption function * Timer switch: countdown, timer, set daily repeat timer * Overcharge protection: When the power is less than 3W for 40 minutes, it will be automatically turned off <need to be turned on manually> * Material: plastic ABS+PC and metal frame * Crystal tempered glass panel will never fade. The switch will always look like new. * Fireproof ABS plastic box, prevents excessive heat result in fire, reducing the security risk. * With LED indicator, very distinguished in the darkness. * Single live wire control, easy to install, replace the old switch directly.		
207	Smart Water Heater Switch (EU/US Standard for option)	GS-DS-101BZN ZigBee	* Operating Voltage: AC110V-240V/50Hz-60Hz * Switch Dimension: 4.7 x 2.9 x 1.5 in * Rated load: each gang less than 300W * Self consuming power: Less than 1mA * Operating environment: -20~50°C, Less than 95%RH * Life long: more than 100,000 times * App: IOS/Android * Works with Alexa, Google Assistant*		
208	US/AU ZigBee 1 gang smart wall switch (with neutral wire)	GS-1KNL/US-TZB-W	Wireless protocol: ZigBee 3.0 (Wi-Fi2.4GHz) Working voltage: AC 90-250V, 50Hz/60Hz (with neutral wire) 110V~60Hz (without neutral wire) 220V~50Hz (without neutral wire) Environment: Working temperature: 0 to 40 degrees Relative humidity: less than 95% Rated current (with neutral wire): Max 10A (resistive load) Rated current (without neutral wire) Max 2.5A/5A (resistive load) Size: 118mm*72mm*38mm/36mm*36mm*34mm for option. Materials: Tempered glass panel and fireproof PC APP support:IOS/Android Load type: Incandescent lamp: 500W/gang LED lamp: 120W/gang, Energy saving lamp:200W/gang RF operating frequency:433.92MHz		
209	US/AU ZigBee 2 gang wall switch (with neutral wire)	GS-2KNL/US-TZB-W			
210	US/AU ZigBee 3 gang wall switch (with neutral wire)	GS-3KNL/US-TZB-W	<b>Product Size Parameters</b> 		
211	US/AU ZigBee 4 gang wall switch (with neutral wire)	GS-4KNL/US-TZB-W			










212	 <p>US/AU ZigBee Dimmer Switch</p>	GS-1KNL/US-TWF-W	<p>working voltage: 100V-240V~, 50Hz/60Hz          working current: 2A Max (pure resistive load)          wiring: with neutral          load type: dimmable lamp less than 400W          product material: toughened glass panel + fireproof PC shell          size(length*width*high): 115mm*72mm*38mm          using environment: temperature 0℃~40℃, relative humidity &lt;95%          wireless standard: Wi-Fi IEEE802.11 b/g/n 2.4GHz          security mechanism: WPA-PSK/WPA2-PSK          voice speakers: Amazon Alexa, Google Assistant, etc.</p> <p>APP: "Smart Life"APP, "Tuya Smart"APP</p>		
213	 <p>US/AU ZigBee Speed Regulating Switch</p>	GS-1KNL/US-TWF-W	<p>working voltage: 100V-240V~, 50 Hz / 60 Hz          working current: 2A max (pure resistive load)          wiring: with neutral          load type: within 400W (motor load)          product material: toughened glass panel + fireproof PC shell          size(length*width*high): 115mm*72mm*38mm          use environment: temperature 0℃~40℃, relative humidity &lt;95%          wireless standard: Wi-Fi IEEE802.11 b/g/n 2.4GHz          security mechanism: WPA-PSK/WPA2-PSK          voice speakers: Amazon Alexa, Google Assistant, etc.</p> <p>APP: "Smart Life"APP, "Tuya Smart"APP</p>		
214	 <p>US/AU ZigBee Curtain Switch</p>	GS-1KNL/US-TWF-W	<p>working voltage: 100V-240V~, 50 Hz / 60 Hz          working current: 2A max (pure resistive load)          wiring: with neutral          load type: curtain motor less than 400W          product material: toughened glass panel + fireproof PC shell          size(length*width*high): 115mm*72mm*38mm          use environment: temperature 0℃~40℃, relative humidity &lt;95%          wireless standard: Wi-Fi IEEE802.11 b/g/n 2.4GHz          security mechanism: WPA-PSK/WPA2-PSK          voice speakers: Amazon Alexa, Google Assistant, etc.</p> <p>APP: "Smart Life"APP, "Tuya Smart"APP</p>		

## Smart Outlets/Sockets










No.	Picture	Model	Features	Price (EXW)	Compatible devices
166	 UK&CN standard WIFI 5 hole universal plug intelligent socket	GS-1539WN	<b>EU, UK, CN standard WIFI 5 hole universal plug intelligent socket</b> 1) Input voltage: 100-240VAC 50/60Hz 2) Connection mode: WIFI 3) Peak current: 13A 4) Regular Color: White/Black/gold/Gray 5) Product Size: 106*100*55mm 6) Package Size: 300gmm 7) Gross weight: 190g		
167	 UK&CN WIFI 5-hole universal plug smart socket with two USB ports	GS-1530WN-2USB	<b>WIFI 5-hole universal plug smart socket with two USB ports</b> 1) Input voltage: 100-240VAC 50/60Hz 2) Connection mode: WIFI 3) Peak current: 13A 4) Regular Color: White/Black/gold/Gray 5) Product Size: 106*100*55mm 6) Package Size: 300gmm 7) Gross weight: 200g		
168	 EU, UK, CN standard Zigbee 5 hole universal plug intelligent socket	GS-1539ZN	<b>EU, UK, CN standard Zigbee 5 hole universal plug intelligent socket</b> 1) Input voltage: 100-240VAC 50/60Hz 2) Connection mode: Zigbee 3) Peak current: 13A 4) Regular Color: White/Black/gold/Gray 5) Product Size: 106*100*55mm 6) Package Size: 300gmm 7) Gross weight: 190g		
169	 Zigbee 5-hole universal plug smart socket with two USB ports	GS-1530ZN-2USB	<b>WIFI 5-hole universal plug smart socket with two USB ports</b> 1) Input voltage: 100-240VAC 50/60Hz 2) Connection mode: Zigbee 3) Peak current: 13A 4) Regular Color: White/Black/gold/Gray 5) Product Size: 106*100*55mm 6) Package Size: 300gmm 7) Gross weight: 200g		
170	 Zigbee smart wall socket (UK-type)	Zigbee-UK16A	Zigbee smart wall socket (UK-type) * Network: zigbee 3.0 * Max power: 3000W * Working current: 16A * Rated frequency: 60Hz * Working voltage: AC110V/250 * Material: ABS flame retarding polymer * Plug Standard: UK * Power consuming: ≤0.3W * Working temperature: -20 ~ 45℃ (-4 ~ 113°F) * Working Humidity: ≤80% * Radio signal power: 1mW * Radio rate: 30 meter indoor * Product weight: 201g * Product dimension: 11*10*5		
171	 WiFi British socket Tuya smart socket tempered glass panel with 1USB & 1 Type C	GS-UKWS01-wifi	WiFi British socket Tuya smart socket tempered glass panel with 1USB & 1 Type C		
172	 Zigbee British socket Tuya smart socket tempered glass panel with 1USB & 1 Type C	GS-UKWS01-zigbee	zigbee British socket Tuya smart socket tempered glass panel with 1USB & 1 Type C		
173	 WiFi 147 British socket Tuya smart socket tempered glass panel with 1USB & 1 Type C	GS-UKWB01-WIFI	WiFi 147 British socket Tuya smart socket tempered glass panel with 1USB & 1 Type C		
174	 ZigBee 147 British socket Tuya smart socket tempered glass panel with 1USB & 1 Type C	GS-UKWB01-Zigbee	ZigBee 147 British socket Tuya smart socket tempered glass panel with 1USB & 1 Type C		
174	 Smart wall socket (EU-type)	Zigbee-EU16A	Smart wall socket (EU-type) * Network: Zigbee/WIFI for your option * Max power: 3000W * Working current: 16A * Rated frequency: 60Hz * Working voltage: AC110V/250 * Material: ABS flame retarding polymer * Plug Standard: EU I		

175	 Smart wall socket (EU-type)	GS-WK-EU16M-WH-MS-WIFI	<ul style="list-style-type: none"><li>* Plug standard: EU</li><li>* Power consuming: ≤0.3W</li><li>* Working temperature: -20 ~ 45℃ (-4 ~ 113°F)</li><li>* Working Humidity: ≤80%</li><li>* Radio signal power: 1mW</li><li>* Radio rate: 30 meter indoor</li><li>* Product weight: 201g</li><li>* Product dimension: 11*10*5</li></ul>		
176	 WiFi Type-C USB wall socket with 20W (EU-type)	WK-Y-EU-U1C-WH-EN	WiFi Type-C USB wall socket with 20W (EU-type) <ul style="list-style-type: none"><li>* Network: zigbee 3.0</li><li>* Color: White</li><li>* Input power: AC100-240V</li><li>* Working current: 16A</li><li>* Rated frequency: 50/60Hz</li><li>* Material: ABS flame retardant polymer</li><li>* Plug Standard: EU standard</li><li>* USB-A: DC5V/3A, 9V/2A, 12V/1.5A;</li><li>USB-B: DC5V/3A, 9V/2.22A, 12V/1.5A</li><li>USB-A USB-C: 5V/3.4A (MAX)</li><li>* Working temperature: -20 ~ 45℃ (-4 ~ 113°F)</li><li>* Working Humidity: ≤80%</li><li>* Radio signal power: 1mW</li><li>* Radio rate: 30 meter indoor</li><li>* Product weight: 161g</li><li>* Product dimension: 11*10*5</li></ul>		
177	 WiFi smart outlet (US standard)	WK-US2U-WH-EN	<div>Number of holes 2 digits Number of jacks: 3 holes Number of USB ports: 1 full length: wireless switch mode: sub-control Rated current: 15A 3C rated voltage range: Above 50V 440V and below Product Series: American standard 2 plug + USB Rated voltage: AC220V Rated frequency: 60Hz rated power: Single 1500W Total 2500W Inductive load less than 2000W</div>	<div>USB output parameters: 5V 1A Support system: Android 4.4 or iOS9.0 or above wireless connection: wifi IEEE 802.11 b/g/n 2.4GHz Support third-party applications: Alexa special function: Voice control function Color: White shell material: ABS Conductor material: Tin Phosphor Bronze Weight: 0.24kg</div>	
178	 Zigbee smart wall socket (US-type)	Zigbee-US15A	<div>Number of holes 2 digits Number of jacks: 3 holes Number of USB ports: 1 full length: wireless switch mode: sub-control Rated current: 15A 3C rated voltage range: Above 50V 440V and below Product Series: American standard 2 plug + USB Rated voltage: AC220V Rated frequency: 60Hz rated power: Single 1500W Total 2500W Inductive load less than 2000W</div>		
179	 Smart PD Power Strip	WIFI-301-AP	<ul style="list-style-type: none"><li>* Material: anti-fire ABS Material materials</li><li>* Rated power: 30W Type-C Input: 110-240V ~ 60Hz 15A 1875W;</li><li>USB-C Output: 5V ~ 3A/9V ~ 3A/15V ~ 2A/20V ~ 1.5A;</li><li>USB-A Output: 5V ~ 2.4A Max (2.4A Max Per Port);</li><li>* Working current: 10A AC220-240V 50Hz 2000W</li><li>* Versatile protection on all outlets</li><li>* Compact design, lightweight and portable</li><li>* Neatly arranged plug and ports</li><li>* Includes built-in 5Ft. power cord</li><li>* 12 months Warranty and lifetime technical support</li></ul>		
180		Zigbee-301-AP			

## Smart Curtain Motor/Motor track


No.	Picture	Model	Features	Price (EXW)	Compatible devices
181		Zigbee curtain motor ZIGBEE-GM46	Draging Start/Stop. Stop in case of obstruction. Electronic Limit. Speed Regulation. Stop Setting At Any Point. Intelligent Route Amending. Dry Contact onrol. AC contact Control. Match Code&Reset Without Setting Button. Fabric Tracdon Identify. Fabric Rbouncing Identify. Overload Protection. Runing Overtime Protection 1)AC90V to 240V 50/60Hz 2)Working environment: -5℃~45℃ 3)Rated power: 20W 4)Rated torque: 2.0N·m 5)Wireless transmission: Zigbee 6)App application name: Tuya/Smart life APP		
182		wifi curtain motor WIFI-GM46			
183		Curtain motor drive head for GM46	Curtain motor drive head for GM46 Curtain motor. Wholesale distributors can buy the motor track locally with collocation		
184		curtain remote control (Compatible with RF433 devices)			
185		curtain motor track GD02	•Material: aluminum alloy •Weight: 14KG or more (depend on its length ) •Belt: 7pcs of 3X2 molybdenum wire •Boom: 304 stainless steel •Hanging wheel: 304 stainless steel •Material: aluminum alloy •Weight: 14KG or more (depend on its length ) •Belt: 7pcs of 3X2 molybdenum wire •Boom: 304 stainless steel		
186		GM46-114-Zigbee	Smart curtain kit with 1x Zigbee motor+1x 1.14 Meter track+ 1x one-way remote control Track dimension: 1x50CM, 2x20CM, 1x10CM, rotating box 14CM, extension piece 3CM		
187		GM46-114-WIFI	Smart curtain kit with 1x WiFi motor+1x 1.14 Meter track+ 1x one-way remote control Track dimension: 1x50CM, 2x20CM, 1x10CM, rotating box 14CM, extension piece 3CM		
188		GM46-214-Zigbee	Smart curtain kit with 1x Zigbee motor+1x 2.14 Meter track+ 1x one-way remote control Track dimension: 1x1M, 1x50CM, 2x20CM, 1x10CM, 1x rotating box 14CM, extension piece 3CM		
189		GM46-214-WIFI	Smart curtain kit with 1x WiFi motor+1x 2.14 Meter track+ 1x one-way remote control Track dimension: 1x1M, 1x50CM, 2x20CM, 1x10CM, 1x rotating box 14CM, extension piece 3CM		
190		GM46-314-Zigbee	Smart curtain kit with 1x Zigbee motor+1x 3.14 Meter track+ 1x one-way remote control 2x1M, 1x50CM, 2x20CM, 1x10CM, 1x rotating box 14CM, extension piece 3CM		
191		GM46-314-WIFI	Smart curtain kit with 1x WiFi motor+1x 3.14 Meter track+ 1x one-way remote control 2x1M, 1x50CM, 2x20CM, 1x10CM, 1x rotating box 14CM, extension piece 3CM		
192		GM46-414-Zigbee	Smart curtain kit with 1x Zigbee motor+1x 4.14 Meter track+ 1x one-way remote control 3x1M, 1x50CM, 2x20CM, 1x10CM, 1x rotating box 14CM, extension piece 3CM		
193		GM46-414-WIFI	Smart curtain kit with 1x WiFi motor+1x 4.14 Meter track+ 1x one-way remote control 3x1M, 1x50CM, 2x20CM, 1x10CM, 1x rotating box 14CM, extension piece 3CM		
194		GM46-514-Zigbee	Smart curtain kit with 1x Zigbee motor+1x 5.14 Meter track+ 1x one-way remote control 4x1M, 1x50CM, 2x20CM, 1x10CM, 1x rotating box 14CM, extension piece 3CM		
195		GM46-514-WIFI	Smart curtain kit with 1x WiFi motor+1x 5.14 Meter track+ 1x one-way remote control 4x1M, 1x50CM, 2x20CM, 1x10CM, 1x rotating box 14CM, extension piece 3CM		
196		GM46-614-Zigbee	Smart curtain kit with 1x Zigbee motor+1x 6.14Meter track+ 1x one-way remote control 5x1M, 1x50CM, 2x20CM, 1x10CM, 1x rotating box 14CM, extension piece 3CM		
197		GM46-614-WIFI	Smart curtain kit with 1x WiFi motor+1x 6.14 Meter track+ 1x one-way remote control 5x1M, 1x50CM, 2x20CM, 1x10CM, 1x rotating box 14CM, extension piece 3CM		
198		zigbee curtain motor ZIGBEE-DJ01	1.Easy to control Curtain via mobile APP/ scene switch panel and echo 2. Support manual sensing function 3. High quality motor configuration 4.Electronic Memory Limit Function 5.Resistance and Stop Function 6.Rated torque: 1.5Nm 7. Rated speed: 120rpm 8.Curtain line retracting speed: 12cm/s		
199		wifi curtain motor WIFI-DJ01			
200		Zigbee-DJ02	The Smart curtain kit include:①zigbee Smart curtain motor ②retractable rail ( 2.45-4.5M) ③Remote controller*1pcs Features: 1. New ultra-quiet architecture design, truly silent operation 2. Ultra-small size, large torque 3. High-grade thickened piano paint process 4. The second gear speed is adjustable 5. Fabric canteen automatic repair 6. DC wide voltage, no fear of current fluctuations 7. Support hotel plug-in card power/dry contact/485 control mode ①Torque: 1.2Nm ②Voltage: 100~240V ③Weight: 50KG ③Rated speed: 80-120 (rpm) ④Opening/closing speed (cm/s)		
201		WIFI-DJ02			



203		GS-LS-BLE (BLE version)	<ol style="list-style-type: none"> <li>1.Timer your shedule via APP to set open or close time for roller shutters</li> <li>2.Compatible with a variety of shades,blinds,curtains.</li> <li>3.AC adapter is a must for normal use of the wifi blinds motor with no battery powered</li> <li>4.Support one mobile phone to control multiple devices or multiple mobile phone to control one device.</li> <li>5.RF remote control supported as another single control method</li> </ol>		
204		GS-LS-WIFI (WIFI version)			
205	 <b>Smart Motorized Roller Blinds Drive Motor</b>	GS-LS-ZIG (ZIGBee version)			
206	  <b>(EU standard) WIFI smart curtain switch</b>	GS-WS-EU-C (EU standard)	European/UK/CB Wifi touch curtain switch <ol style="list-style-type: none"> <li>1. Mobile phone APP control</li> <li>2. Smart speaker voice control</li> <li>3. Automation scene linkage WIFI + RF433</li> </ol>		
207	  <b>US standard Wifi touch curtain switch</b>	GS-WS-US-C (USA standard)	USA standard Wifi touch curtain switch <ol style="list-style-type: none"> <li>1. Mobile phone APP control</li> <li>2. Smart speaker voice control</li> <li>3. Automation scene linkage WIFI + RF433</li> </ol>		





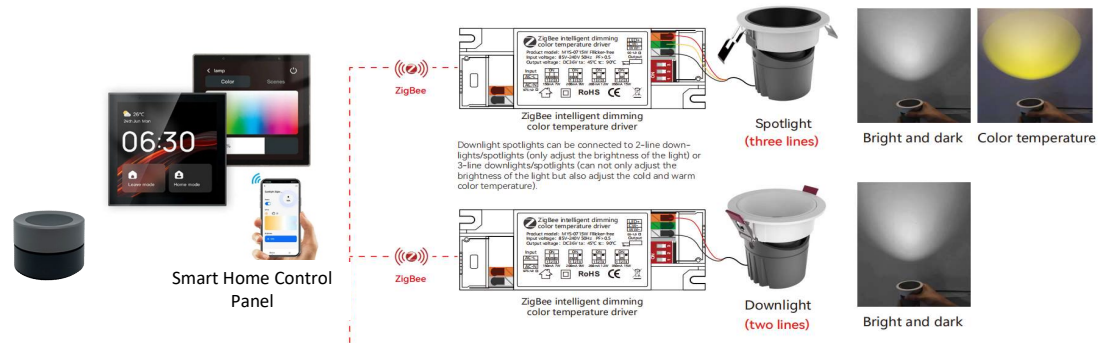











### Schematic Diagram of Downlight and Light Strip Dimming





No.	Picture	Model	Features	Price (EXW)	Compatible devices
208		3TD-SW/7W	① Lamp surface size: 68*H75mm ② hole size: 55mm ③ Light Angle: 15°24°36° ④ Angle adjustable: adjustable ⑤ Color temperature: 2700K-6500K		
209		3TD-7W	① Lamp surface size: 85*H83mm ② hole size: 75mm ③ Light Angle: 15°24°36° ④ Angle adjustable: adjustable ⑤ Color temperature: 2700K-6500K		
210		3TD-10W/12W	① Lamp surface size: 85*H83mm ② hole size: 75mm ③ Light Angle: 15°24°36° ④ Angle adjustable: adjustable ⑤ Color temperature: 2700K-6500K		
211		TD1-7W	① Lamp surface size: 85*H75mm ② hole size: 75mm (diameter) ③ Light Angle: 90°120° ④ brightness: 3000/4000/6000K for option ⑤ product color: white/Black		
212		TD1-10W/12W	① Lamp surface size: 102*H52mm ② hole size: 95mm (diameter) ③ Light Angle: 90°120° ④ brightness: 3000/4000/6000K for option ⑤ product color: white/Black		
213		TD1-15W	① Lamp surface size: 126*H66mm ② hole size: 120mm (diameter) ③ Light Angle: 90°120° ④ Color temperature: 2700K-6500K ⑤ product color: white/Black		
214		TD1-20W	① Lamp surface size: 126*H66mm ② hole size: 120mm (diameter) ③ Light Angle: 90°120° ④ brightness: 3000/4000/6000K for option ⑤ product color: white/Black		
215		GS-XH-EZ038-Zigbee	Lamp head type: E26 E27 Control type: IEEE 802.15.4, ZigBee 3.0 Usage requirements: used with ZigBee gateway Product size: 125*58*125 mm, Net weight: 170g,		

216		GS-XH-EZ03B-WIFI	Input voltage range: 90-250V 50/60HZ, Output power: 12W, Lumen: 1050lm Opening size: 90-110mm, Service life: 40000H		
217		MYS-0715W	It can control the down lamp and spot lamp cold light and warm light constant voltage dimming driver Power: Color Temperature adjustment 7W 9W 12W Input voltage :AC85-265V Output voltage: DC21V-36V Output current: 7W 150mA 9W 200mA 12W 260mA Size MM: 100*36*23		
218		FGD-10W	①Applicable track: Suitable for 20MM width track ②Product Name: Floodlight (Magnetic suction style) ③Size: <u>L300*W22*H25 mm</u> ④Color temperature: 2700-6000K ④Irritation angle: 120° ⑤Input voltage: DC48V		
219		FGD-20W	①Applicable track: Suitable for 20MM width track ②Product Name: Floodlight (Magnetic suction style) ③Size: <u>L600*W22*H25</u> ④Color temperature: 2700-6000K ④Irritation angle: 120° ⑤Input voltage: DC48V		
220	Zigbee Floodlight (Magnetic suction style)	FGD-40W-1.2M	①Applicable track: Suitable for 20MM width track ②Product Name: Floodlight (Magnetic suction style) ③Size: <u>L900*W22*H25</u> ④Color temperature: 2700-6000K ④Irritation angle: 120° ⑤Input voltage: DC48V		The track's length is 1.2M, 40W










221		CXSD-10W	①Applicable track: Suitable for 20mm width track ②Product Name: Spotlight(Magnetic suction style) ③Size:(dia.)45°L100mm ④Color temperature: 2700-6000K ⑤Irritation angle: 15°24°36° ⑥Input voltage: DC48V		
222	Zigbee Spotlight (Magnetic suction style)	CXSD-15W	①Applicable track: Suitable for 20mm width track ②Product Name: Spotlight(Magnetic suction style) ③Size:(dia.)45°L100mm ④Color temperature: 2700-6000K ⑤Irritation angle: 15°24°36° ⑥Input voltage: DC48V		
223		GSD-6W	①Applicable track: Suitable for 20MM width track ②Product Name: Grille light (Magnetic suction style) ③Size: <b>L110°W22°H25</b> ④Color temperature: 2700-6000K ⑤Irritation angle: 24°36° ⑥Input voltage: DC48V		
224		GSD-12W	①Applicable track: Suitable for 20MM width track ②Product Name: Grille light (Magnetic suction style) ③Size: <b>L220°W22°H25</b> ④Color temperature: 2700-6000K ⑤Irritation angle: 24°36° ⑥Input voltage: DC48V		
225	Zigbee grille lamp (Magnetic suction style)	GSD-18W	①Applicable track: Suitable for 20MM width track ②Product Name: Grille light (Magnetic suction style) ③Size: <b>L328°W22°H25</b> ④Color temperature: 2700-6000K ⑤Irritation angle: 24°36° ⑥Input voltage: DC48V		
226		ZDGSD-6W	①Applicable track: Suitable for 20MM width track ②Product Name: Grille light (Magnetic suction style) ③Size: <b>L138°W22°H100</b> ④Color temperature: 2700-6000K ⑤Irritation angle: 24°36° ⑥Input voltage: DC48V		
227		ZDGSD-12W	①Applicable track: Suitable for 20MM width track ②Product Name: Grille light (Magnetic suction style) ③Size: <b>L230°W22°H100</b> ④Color temperature: 2700-6000K ⑤Irritation angle: 24°36° ⑥Input voltage: DC48V		
228	ZigbeeCollapsible grill light (Magnetic suction style)	ZDGSD-18W	①Applicable track: Suitable for 20MM width track ②Product Name: Grille light (Magnetic suction style) ③Size: <b>L370°W22°H100</b> ④Color temperature: 2700-6000K ⑤Irritation angle: 24°36° ⑥Input voltage: DC48V		
229	 Magnetic suction lamp mounting track (Hidden type/surface mount)	AZGD-20MM-1.5 (thickness 1.5mm)	Installation mode: Slot 35mm Input voltage :DC48V Free splicing type, thickness 1.5mm, Four copper wire, The whole meter multiple sales, If choose white color plus \$0.5	 	The default is one meter, Maximu 2 meters/piece.Over 2 meters, we will suggest order multi-pieces.
230	 Magnetic suction lamp mounting track (Hidden type/suspension type/surface mount)	AZGD-20MM-2.0 (thickness 2.0mm)	Installation mode: Slot 35mm Input voltage :DC48V Free splicing type, thickness2.0mm, Four copper wire, The whole meter multiple sales, If choose white color plus \$0.5	 	The default is one meter, Maximu 2 meters/piece.Over 2 meters, we will suggest order multi-pieces.
231		CXDY-100W	Power: 100W Output voltage: DC48V		
232	Magnetic suction lamp power supply	CXDY-200W	Power: 200W Output voltage: DC48V		
233	 R20-1 negative Angle	R20-1-NA	Magnetic suction lamp track adapter 		
234	 R20-1 plane L Angle	R20-1-PA			
235	 T-shaped corner	R21			

236	 +-shaped corner	R23	+-shaped corner for Magnetic suction lamp track		
237	 Connecting piece for corner	LJP	Connecting piece for Magnetic suction lamp track corner		
238	 1.5 meters of suspended wire	DX-1.5M	1.5 meters of suspended wire		
239	 load module	SRMK	load module for Magnetic suction lamp track		
240	 Pass through module	ZTMK	Pass through module for Magnetic suction lamp track		
241	 Angle module	ZJMK	Angle module for Magnetic suction lamp track		
242	Smart Light Strip Dimming				
243	 Smart Home Control Panel		 ZigBee intelligent dimming color temperature driver	 Light strip (three lines)	 Bright and dark Color temperature
244	 4" touch smart voice control panel with built-in Alexa (WiFi+Zigbee +BLE)	T1E-TPP01-Z	<p>T1E is a Tuya smart central control panel integrated with Tuya smart home gateway + built-in Alexa voice control (English, Spanish, Arabic, German &amp; French) + super Zigbee device compatibility + group dimming system.</p> <p><b>Main Features:</b></p> <ol style="list-style-type: none"><li>1. A best alternative of tuya ZigBee gateway at home, 100+ Zigbee sub-devices can be added in.</li><li>2. 3 Control modes at different distance with 3 themes</li><li>3. Multimedia interconnection function. Add smart doorbell and smart camera, which will show the screen outside the door when someone rings the bell, contributing a higher level of security to the family.</li><li>4. Support group wireless dimming lighting. Works with zigbee dimming driver, can realize single light and group lights dimming.</li></ol>		 works with the Google Assistant WORKS WITH amazon alexa
245	 two-color low voltage 24V high color rendering light strip (10 meters per roll)	24V-2835-192	Power: 20W, Color Temperature: 3000K-6000K, Voltage: DC24V  <b>Re:16W per meter</b>		
246	 RGB COB low voltage light strip (5 meters per roll)	GS-COB-RGB-5M			
247	 COB low voltage light strip (10 meters per roll)	GS-COB-24V-684D-10mm	Product name:COB smart light strip Specifications: DC 24V-684D-10mm Color temperature: dual color temperature 2700K+6500K Power: 9+9W/meter Waterproof level: IP20 Packing quantity: 10 meters/roll CRI:95 240220		


248	 Constant Voltage light strip driver (2 colors)	GS-DDQD	Input voltage :DC 5-24V Output current/Channel:6A max Total Output Current:15A max Operating Temperature :-20 to+60℃ Constant Voltage		
249		DDY-100W	Power:100W, Color Temperature: 3000K-6000K, Voltage: DC24V Power supply: 110V-240V		
250		DDY-150W	Power: 150W, Color Temperature: 3000K-6000K, Voltage: DC24V		
251		DDY-200W/300W	Power: 200W/300W, Color Temperature: 3000K-6000K, Voltage: DC24V		
252	 24V Transformer Power Supply	103-0505 MMM994	RGB+3000K+6000K five-in-one, 24V/m, DC24V, three-year warranty. 10 meters per roll.		
253	 zigbee light strip driver RGB+C+W	GS-TGOZRBCW	Rated power: 12V-120W/24V-240W Input voltaa: DC12-24V Output current: 10ADC Support RGBCW light strip		
254	 zigbee light strip driver RGB	GS-TGOZRGB	Rated power: 12V-120W/24V-240W Input voltaa: DC12-24V Output current: 10ADC Support RGBCW light strip		
255	 Smart Wi-Fi Bulb	DP01-9W	<ul style="list-style-type: none"> <li>* Support status tracking, home appliances status timely feedback to your device.</li> <li>* Support 16,000,000 colors adjust with your smart phone</li> <li>* Support Lum adjust with smart phone</li> <li>* Easy installation, easy handling and can be activated immediately and stably.</li> <li>* humidity: ≤80%</li> <li>* Wireless consuming: ≤0.3W</li> <li>* Encryption type :AES</li> </ul>		
256	 RGBCW Smart Zigbee Bulb	GS-ZGA19	Tuya Zigbee 3.0 Power: 9W 850LM Size: 60*114mm Voltage 85-265V Working temp.: -25℃ to 45℃ Connector: E27, E26, B22 Ra:80 PF:0.5290 Needs to work with gateway, Support Amazon, Google, Xiaodu and other major smart speakers		
257	 RGBCW Smart Zigbee Bulb	GS-ZGGU10	Tuya Zigbee 3.0 Power: 5W 450LM Size:45*57mm Voltage 85-265V Working temp.: -25℃ to 45℃ Connector: GU10 Support Amazon, Google, Xiaodu and other major smart speakers	Certificate: CE/FCC ID/Rohs	
258	 zigbee knob scene button support dimming	GS-SY-RD	GS-SY-RD is a multi-functional scene button, which can trigger full on or full off mode with one button, and turn the knob to adjust the brightness of the light. Double click for away mode to turn off all your lights,air conditioners,fans and other electronic devices. working voltage:DC3V Receive sensitivity:-98dBm Standby Consumption:0.8uA Life of battery:1 year(general use)		
259	 zigbee button scene stickers	GS-SY-SR	zigbee wireless button scene stickers Support dimming		
260	 Knob Dimmer Switch	GS-TGKG	Knob Dimmer Switch (for SCR dimming LED light) 1.when the light is on,the user can touch the control panel adjust the brightness of the light,and the status indicator on the panel will change at the same time. 2.Touch Dimming: Move your finger up and down to adjust the light level 3.Set the mode with APP from anywhere 4.Exquisite craft and extraordinary protection Mechanism		   







261		WIFI-1WAA	<p>European/UK/GB Knob Dimmer Switch <b>(for SCR dimming LED light)</b></p> <p>1.Rotary Dimming Control: Rotate your finger left and right adjust the brightness</p> <p>2.Compatible Bulbs: INC 300W / LED Dimmable 220W / CFL Dimmable 220W</p> <p>3. 2.4G WIFI / Dimmer light / Multi-platform Support / Mechanical Push On/Off button</p> <p>4.Exquisite craft and extraordinary protection Mechanism</p>	
262		Zigbee-1WAA		(Black color, MOQ100pcs)
Knob Dimmer Switch 1WAA-EU				

## Smart Valve Controller/Gas Machine Hand/Gas Leakage Sensor



No.	Picture	Model	Features	Price (EXW)	Compatible devices
259	 <p>WIFI Smart Garage Controller</p>	GS-MS102	Smart Garage Controller :This product is suitable for dry contact motor controlled garage doors Input:AC100-240V 50/60HZ Output:NO Power:300W Electricity:16A		<p>EASY INSTALLATION</p> 
260	 <p>Smart Valve Controller</p>	WIFI-LZ	1) Valve pressure: 1.6MPa 2) Rated torque: 30-60kg.CM 3) Rated speed:76rpm 4) Scheduled time for start and stop. 5) Low noise. 6) Auto stop when blocked. 7) Support Amazon Echo voice control.		
261		ZIG-LZ			
262	 <p>Smart Valve Controller</p>	WIFI-QY-WH	1) Valve pressure: 1.6MPa 2) Rated torque: 30-60kg.CM 3) Rated speed:76rpm 4) Scheduled time for start and stop. 5) Low noise. 6) Auto stop when blocked. 7) Support Amazon Echo voice control.		
263		ZIG-QY-WH			
264	 <p>Zigbee Smart Thermostatic Radiator Valve</p>	GS-ZTRV-PJ-601	<p><b>Zigbee Smart Thermostatic Radiator Valve</b></p> <ul style="list-style-type: none"> <li>- Accessible via your smartphone app, easy remote control after successful network configuration</li> <li>- Programmable device with customized exclusive temperature plan, up to 6 events allowed to set each day</li> <li>- After no operation for more than 5 seconds, the device enters sleep mode, which can save energy and prolong battery life</li> <li>- Long press the Set Button for 3 seconds to switch the screen display direction.</li> </ul> <p>Specifications</p> <p>Power supply: 3x1.5V alkaline AA batteries (not included)</p> <p>Protection degree: IP20</p> <p>Ambient Temperature: 0-50 ℃</p> <p>Surface temperature: 90℃ Max (at the radiator)</p> <p>Connection: M30x1.5mm</p> <p>Linear Travel: 4.3mm</p>		
265	 <p>WiFi Smart Thermostatic Radiator Valve</p>	GS-ZTRV-PJ-603	<p><b>Wi-Fi Smart Thermostatic Radiator Valve</b></p> <p>Automatic debugging function, suitable for all kinds of mainstream valves\ The device supports Wi-Fi fast distribution network, no additional gateways required</p> <p>Intelligent PID algorithm, efficient control of valve opening and closing.energy saving and environmental protectionThe motor adopts ultra-quiet technology to minimize noise pollutionThe device has activated the automatic conversion of summer time and wintertime, which can be activated or terminated as needed</p> <p>Specifications</p> <p>Power supply: 3x1.5V alkaline AA batteries (not included)</p> <p>Protection degree: IP20</p> <p>Ambient Temperature: 0-50 ℃</p> <p>Surface temperature: 90℃ Max (at the radiator)</p>		
266			Tuya WiFi Zigbee circuit breaker and WiFi meter		
267		WCB-SC-1P80-WIFI	WiFi circuit breaker 1P 10A-80A support SAAS		
268		WCB-SC-1P80-ZIG	Zigbee circuit breaker 1P 10A-80A support SAAS		
269		WCB-SC-1P100-WIFI	WiFi circuit breaker 1P 100A support SAAS		
270		WCB-SC-1P100-ZIG	Zigbee circuit breaker 1P 10A-80A support SAAS		
271		WCB-SC-2P80-WIFI	Wifi breaker 2P 10A-80A support SAAS		
272		WCB-SC-2P80-ZIG	Zigbee breaker 2P 10A-80A support SAAS		
273		WCB-SC-2P100-WIFI	WiFi circuit breaker 2P 100A support SAAS		
274		WCB-SC-2P100-ZIG	Zigbee circuit breaker 2P 100A support SAAS		
275		WCB-SC-1P100M-WIFI	Wifi circuit breaker 1P 10A-100A with power meter support SAAS		
276		WCB-SC-1P100M-ZIG	Zigbee circuit breaker 1P 10A-100A with power meter support SAAS		











277		WCB-SC-2P100M-WIFI	Wifi circuit breaker 2P 10A-100A with power meter support SAAS with electricity leakage protection function		
278		WCB-SC-2P100M-ZIG	Zigbee circuit breaker 2P 10A-100A with power meter support SAAS with electricity leakage protection function		

279	 	WCB-SC-3P80 -WIFI	Wifi circuit breaker 3P 10A-80A support SAAS		
280		WCB-SC-3P80 -ZIG	Zigbee circuit breaker 3P 10A-80A support SAAS		
281		WCB-SC-3P100 -WIFI	Wifi circuit breaker 3P 100A support SAAS		
282		WCB-SC-3P100 -ZIG	Zigbee circuit breaker 3P 100A support SAAS		
283	 	WCB-SC-4P80- WIFI	Wifi circuit breaker 4P 10A-80A support SAAS		
284		WCB-SC-4P80- ZIGBEE	Zigbee breaker 4P 10A-80A support SAAS		
285	 	GS-WM wifi meter 5-60A	1.Real-time monitor of electricity consumption 2.Timer and Shedule via mobile APP		

No.	Model	Name	Picture	Communication	Adaptable lock body types	With Camera or not	MOQ	Price	Functions
286	F8-TY-WIFI	Smart door lock		WiFi	24*240mm lock body (Not included in the price)	No	1-18pcs: 19-4999pcs 5000pcs:		<ol style="list-style-type: none"> <li>Smart door lock with Zinc alloy material</li> <li>1 group of master code, 100 groups of fingerprint users</li> <li>Fingerprint scanning time : &lt;0.1s</li> <li>Smart fingerprint recognition function: 360° fingerprint detector; from young to elder, a person only need to record his fingerprint one time, then he can unlock the door through his whole life.</li> <li>Adpt phantom password technology, you can add some numbers before/after you input the real password, which can avoid other people peep your password.</li> <li>Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card.</li> </ol>
287	F8-TY-ZIGBEE	Smart door lock		Zigbee	24*240mm lock body (Not included in the price)	No	1-18pcs: 19-4999pcs 5000pcs:		
288	GS-K7	24*240 lock body		/	This lock body can be matched with the F8-TY-WIFI & F8-TY-ZIGBEE	No	MOQ: 1		Lock body size: 24*240mm Special national standard lock body. Stainless steel material
289	GS-H20-P	Fingerprint+Video doorbell smart door		WiFi	24*240mm lock body (Not included in the price)	Yes	QTY: <50 ≥500		<ol style="list-style-type: none"> <li>When the guest rings the doorbell, the smart door lock will capture the photo of the guest and send it to the APP of the host's mobile phone, and the host's mobile phone will also receive a video popover to view the real-time situation of the door. If it is someone you know, you can directly unlock the door remotely on the phone.</li> <li>Every time the lock is opened, the mobile APP will receive push information</li> <li>Work with tuya mobile APP or smart life APP</li> <li>Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card, mobile APP</li> </ol>
290	GS-H20P-3D	3D Face recognize + Fingerprint cat eye+graffiti door lock		WiFi	24*240mm lock body (Not included in the price)	Yes	QTY: <50 ≥500		<ol style="list-style-type: none"> <li>Face Fingerprint cat eye+graffiti door lock, real materials reject plastic knobs plastic handles.</li> <li>Remote Unlock function, press the electronic doorbell to take a picture and upload it to the mobile phone.</li> <li>Semiconductor fingerprint recognition instantly identify rejected clones.</li> <li>Magnesium sensing technology, ready all fingerprints, whether dry or wet solid wear-resistant protective coating, anti-static.</li> <li>Triple alarm function, isolates high frequency pulse interference, and will not cause accidental door opening.</li> <li>Low light imaging Real bright enough clearly visible Outside/Creative fish eye imaging wider viewing angle range, built in fill light module has good imaging effect in low light environment.</li> <li>Unlock ways: Fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card, mobile APP, face</li> </ol>
291	GS-K7	24*240 lock body		/	This lock body can be matched with the GS-H20P-3D/GS-H20-P	No	MOQ: 1		Lock body size: 24*240mm Special national standard lock body. Stainless steel material
292	GS-JLX7-TY	WiFi Smart Indoor Lock for wooden door		WiFi	 Comes with 160*22mm lock body	No	QTY: <100pcs: ≥500pcs: ≥5000pcs: MOQ: 10pcs/box		<ol style="list-style-type: none"> <li>Brushed black craft material</li> <li>24-digit dummy password, including 6-11 digits of correct secret to prevent peeping</li> <li>Unlock method: By password, fingerprint, IC card, key and App remote unlock.</li> <li>4pcs AAA battery power supply, emergency power supply by micro USB</li> <li>Suitable for wooden door, suitable for the door thickness: 38-55mm</li> <li>Product dimension: 240x 60x 21mm</li> <li>Be compatible with tuya smart life app</li> <li>Standard kit comes with 5050 lock body 160 long</li> </ol>
295	lockGS-R5-WIFI	Tuya WiFi Handle intelligent door		WiFi	Comes with lock body	Yes	QTY: <50 ≥500		WiFi smart door lock IC card, key, fingerprint, password, APP, Linking with other devices Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card.
296	GS-HF-32	Tuya Bluetooth Smart door lock		Bluetooth	Comes with lock body	No	QTY: <50 ≥500		<ol style="list-style-type: none"> <li>Low Battery Powered by 4 pcs AAA batteries</li> <li>USB charging port available for running -out batteries</li> <li>Emergency mechanical key available for unlocking without interface</li> <li>Create one-time, periodic and temporary password with effective and expiration time in smart life APP or tuya APP</li> </ol>
297	F7-TT-BLE	Smart door lock with bluetooth function (APP: TT lock)		Bluetooth	24*240mm lock body	No	QTY: <50 ≥500		Unlocking method: fingerprint/password/IC card/mechanical key/TT lock APP Functions: Low power voice prompt, anti-picking alarm, password contact error 5 times alarm, virtual password alarm, check the unlock history record function Extended function: TT lock APP, TT lock hotel, hotel PMS Battery: 1.5V (AA alkaline battery) *4pcs Fingerprint module: semiconductor living fingerprint head Fingerprint identification speed: <1s Rejection rate <0.01% power consumption: <50uA Emergency power supply: Micro USB Size: 370*70*28MM (If you don't need fingerprint module, then it will subtract USD2/pcs)
298	GS-E3	Card Reader/Encoder (works with TT lock)		/		No	QTY: <50 ≥500		Support reading card Hotel style hair clips should be used with hotel locks. Support master card, floor card, building card, room card production. Dimensions : 70x70x26mm RF frequency : 13.56Mhz Case material: Plastic Supported card type : MIFareS50 Power supply mode : USB Power port: Type-C USB
299	GS-HF6	Smart door lock HF6 WiFi Version	 <small>Support door lock (with lock body)</small>	WiFi		No	QTY: <50 ≥500		<ol style="list-style-type: none"> <li>Smart door lock with Zinc alloy material</li> <li>9 group of master code, 291 groups of fingerprint users</li> <li>Fingerprint scanning time : &lt;0.1s</li> <li>Smart fingerprint recognition function: 360° fingerprint detector; from young to elder, a person only need to record his fingerprint one time, then he can unlock the door through his whole life.</li> <li>Adpt phantom password technology, you can add some numbers before/after you input the real password, which can avoid other people peep your password.</li> <li>Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card.</li> </ol>
300	GS-TDF1	WiFi cat eye version semi-automatic lock		WiFi		Yes	QTY: <50 ≥500		<ol style="list-style-type: none"> <li>When the guest rings the doorbell, the smart door lock will capture the photo of the guest and send it to the APP of the host's mobile phone, and the host's mobile phone will also receive a video popover to view the real-time situation of the door. If it is someone you know, you can directly unlock the door remotely on the phone.</li> <li>Every time the lock is opened, the mobile APP will receive push information</li> <li>Work with tuya mobile APP or smart life APP</li> </ol>

									4. Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card,mobile APP	
306	GS-M1	WiFi smart door lock with camera		WiFi	Comes with 24*240 lock body	Yes	QTY: ≤50: ≤500		1. When the guest rings the doorbell, the smart door lock will capture the photo of the guest and send it to the APP of the host's mobile phone, and the host's mobile phone will also receive A video popover to view the real-time situation of the door. If it is someone you know, you can directly unlock the door remotely on the phone. 2. Every time the lock is opened, the mobile APP will receive push information 3.work with tuya mobile APP or smart life APP. 4. Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card,mobile APP	Remark: (Comes with lock body 24*240mm/30*240mm (optional), it can be deducted \$5.5 if you don't need the lock body

309	GS-E908	WiFi smart door lock with camera		WiFi	Comes with 24*240 lock body	Yes	QTY: ≤50: ≤\$500		<p>1. When the guest rings the doorbell, the smart door lock will capture the photo of the guest and send it to the APP of the host's mobile phone, and the host's mobile phone will also receive A video popover to view the real-time situation of the door. If it is someone you know, you can directly unlock the door remotely on the phone.</p> <p>2. Every time the lock is opened, the mobile APP will receive push information</p> <p>3.work with tuys mobile APP or smart life APP.</p> <p>4. Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card,mobile APP</p>	Remark: (Comes with lock body 24*240mm/30*240mm (optional), it can be deducted \$6.5 if you don't need the lock body
312	GS-TV8	3D face cat eye version automatic lock	black/star gray 	WiFi	Comes with 24*240 lock body	Yes	QTY: ≤50: ≤\$500		<p>1. When the guest rings the doorbell, the smart door lock will capture the photo of the guest and send it to the APP of the host's mobile phone, and the host's mobile phone will also receive A video popover to view the real-time situation of the door. If it is someone you know, you can directly unlock the door remotely on the phone.</p> <p>2. Every time the lock is opened, the mobile APP will receive push information</p> <p>3.work with tuys mobile APP or smart life APP.</p> <p>4. Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card,mobile APP</p>	Remark: (Comes with lock body 24*240mm/30*240mm (optional), it can be deducted \$6.5 if you don't need the lock body
315	GS-DF3	cat eye version automatic lock	star gray/black 	WiFi	Comes with 24*240 lock body	Yes	QTY: ≤50: ≤\$500		<p>1. When the guest rings the doorbell, the smart door lock will capture the photo of the guest and send it to the APP of the host's mobile phone, and the host's mobile phone will also receive A video popover to view the real-time situation of the door. If it is someone you know, you can directly unlock the door remotely on the phone.</p> <p>2. Every time the lock is opened, the mobile APP will receive push information</p> <p>3.work with tuys mobile APP or smart life APP.</p> <p>4. Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card,mobile APP</p>	Remark: (Comes with lock body 24*240mm/30*240mm (optional), it can be deducted \$6.5 if you don't need the lock body
318	DFS-3D-P	3D face version automatic lock	black 	WiFi	The kit comes with lock body	Yes	QTY: ≤50: ≤\$500		<p>1. When the guest rings the doorbell, the smart door lock will capture the photo of the guest and send it to the APP of the host's mobile phone, and the host's mobile phone will also receive A video popover to view the real-time situation of the door. If it is someone you know, you can directly unlock the door remotely on the phone.</p> <p>2. Every time the lock is opened, the mobile APP will receive push information</p> <p>3.work with tuys mobile APP or smart life APP.</p> <p>4. Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card,mobile APP</p>	Remark: (Comes with lock body 24*240mm/30*240mm (optional), it can be deducted \$6.5 if you don't need the lock body
321	A210-TY	WiFi Broken bridge aluminum lock for outdoor use	black 	WiFi	Comes with 3585 lock body	No	QTY: ≤50: ≤\$500		<p>1. When the guest rings the doorbell, the smart door lock will capture the photo of the guest and send it to the APP of the host's mobile phone, and the host's mobile phone will also receive A video popover to view the real-time situation of the door. If it is someone you know, you can directly unlock the door remotely on the phone.</p> <p>2. Every time the lock is opened, the mobile APP will receive push information</p> <p>3.work with tuys mobile APP or smart life APP.</p> <p>4. Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card,mobile APP</p>	Remark: (Comes with lock body 3585)
323	GS-	3D face version automatic lock	grey/black 	WiFi	Comes with 3585 lock body	Yes	QTY: ≤50: ≤\$500		<p>1. When the guest rings the doorbell, the smart door lock will capture the photo of the guest and send it to the APP of the host's mobile phone, and the host's mobile phone will also receive A video popover to view the real-time situation of the door. If it is someone you know, you can directly unlock the door remotely on the phone.</p> <p>2. Every time the lock is opened, the mobile APP will receive push information</p> <p>3.work with tuys mobile APP or smart life APP.</p> <p>4. Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card,mobile APP</p>	Remark: (Comes with lock body 3585)
324	GS-X10	3D face version Smart Automatic lock	black 	WiFi	Doesn't come with lock body in the kit	Yes	1-6pcs: 6-120pcs: 121-360pcs		<p>Features: Face and body induction start Color: red bronze, deep space gray Screen: 4.5 inches Material: high-grade zinc alloy, IML panel Rejection rate &lt;0.01%, misrecognition rate &lt;0.0001% Face/palm vein/fingerprint storage capacity: 100 groups each Password storage capacity: 5 groups, smart card storage capacity: 20 cards Working power supply: 5000mAh Working environment: humidity &lt;80%, temperature -30°C-60°C Unlocking method: face recognition, fingerprint recognition, temporary password, password, smart card, mechanical key Applicable door thickness: 40-120mm</p>	
325	GS-X6	3D face version Smart Automatic lock		WiFi	Doesn't come with lock body in the kit	Yes	1-6pcs: 6-120pcs: 121-360pcs		<p>Features: face recognition, indoor visible cat's eye, strange stay snapshot Color: Mocha gray Screen: 3.5 inches Material: high-grade zinc alloy, IML panel Rejection rate &lt;0.01%, false recognition rate &lt;0.0001% Face/palm vein/fingerprint storage: 100 groups each Password storage: 5 groups, smart card storage: 20 cards Working power supply: 5000mAh Working environment: humidity &lt;80%, temperature -30°C-60°C Unlocking method: face recognition,fingerprint recognition, temporary password, mobile phone remote, password, smart card, mechanical key Applicable door thickness: 40-120mm</p>	